

★MILTEC®★ ◎

"Reprogram your milling expectations."



Table of Contents

Mil-Tec was created to bring the shearing action of traditional solid carbide machining to indexable carbide face & end milling. Along the way, we pioneered and patented the Freedom Cutter® (allowing 3 insert shapes to fit into the same cutter body pocket) and the Mil-Loc (a positioning device allowing 8 indexes on a round insert). We use only the best technology available from throughout the world, combined into a product line that offers the ultimate in milling application productivity. All of our inserts are precision ground and are suitable for use on a diverse range of materials and machine tools. Our toughest task in application training is getting prospective customers to run our product FAST ENOUGH to take full advantage of the Mil-Tec design. Once accomplished, a Mil-Tec customer is usually one for life.

We guarantee your satisfaction. This Company was created with a total "white-paper" approach; there are no compromises regarding performance. Our goal is to delight our customers.

We are extremely proud of Mil-Tec's products, and are confident you will enjoy using it as much as we enjoy manufacturing it.

Sincerely,

David Povich President



American Made
American Designed
American Owned

ABOUT THIS CATALOG & PRODUCT LINE: The Mil-Tec product line presentation has been greatly simplified with the addition of EDP numbers. While the "old" nomenclature has been discarded from use in this publication, rest assured it will still appear on packaging and sales documentation. Alongside it will be new EDP #'s and an updated, logic-based numbering system used for Freedom Cutter inserts (see page #10 for more information). Our goal is to make this product line as efficient to understand, sell, purchase, and utilize as it is transferring heat from the workpiece to the chip.

Page #1 Cover

Page #2 Table of Contents / Introduction

Page #3 Components of Guaranteed Quality

Page #4 Components of Guaranteed Quality / SmoothCoat

Page #5 Freedom Cutter Plus+ Cutter Bodies

Page #6 Freedom Cutter Plus+45 Shell Mills, High Feed Cutters

Page #7 Specialty FC Bodies; Dedicated Round, Low Profile

Page #8 Specialty FC Bodies; Shank, R8, Chamfer Cutters, Ramp & Plunge

Page #9 Specialty FC Bodies; Finisher, Square Support, Coolant, Aluminum

Page #10 Freedom Cutter Insert Nomenclature & Technical Info

Page #11 FC Insert Pricing & Availability; FC Spare Parts & Special Inserts

Page #12 Freedom Cutter Octagon Inserts by EDP#

Page #13 Freedom Cutter Round Inserts by EDP#

Page #14 Freedom Cutter Square Inserts by EDP#

Page #15 Freedom Cutter Square 90° Inserts by EDP#

Page #16 Freedom Cutter Wiper Inserts by EDP#

Page #17 Freedom Cutter PCD, D1, D2, & Silicon Nitride Inserts by EDP#

Page #18 Mil-Tec FC Madness & Kits

Page #19 Mil-Tec FC Facts, Tips & Hints

Page #20 Freedom Cutter Speeds & Feeds Data, 1st Choice info

Page #21 High Velocity HV3HD End Mills and Inserts

Page #22 High Velocity HV5HD End Mills, Shell Mills, and Inserts

Page #23 High Velocity HV5R Ramping End Mills and Inserts

Page #24 Heavy Duty HD5.1HF High Feed End Mills and Inserts

Page #25 High Velocity HV10 End Mills, Shell Mills, and Inserts

Page #26 High Velocity HV11 End Mills and Inserts

Page #27 HVC10 and HVC11 Chamfer Mill Series

Page #28 HV Series Speeds & Feeds Data, Spare Parts

Page #29 High Feed HD5.1 & HFC Series Speeds & Feeds Data

Page #30 Heavy Duty HD Series Cutter Bodies & Inserts

Page #31 Metric Freedom Cutter Plus+, FC+45, and High Feed Cutter Bodies

Page #32 Metric HV3HD & HV5HD End Mills and Inserts

Page #33 Metric HV10 and Heavy Duty HD Cutter Bodies & Inserts

Page #34 Mil-Tec Specials: Cutter capabilities and unique insert apps

Page #35 Mil-Tec custom HV5SL Slotting Cutters & Inserts

Page #36 Mil-Tec products for Titanium, Inconel, Stainless, Exotics

Page #37 Tool Alliance Biography

Page #38 Mil-Tec's Terms & Conditions

Page #39 Mil-Tec Decimal Chart

Page #40 Back Cover / Mil-Tec Sales Features

Phone (800) 564-5832

Fax (866) 244-0298

miltecusa.com

toolalliance.com

eMail: sales@miltecusa.com










Home of the Freedom Cutter®



Components of Guaranteed Quality

COMPONENT#1: Carbide Substrate From being the first Company to introduce MicroGrain carbide to the mass–market round tool industry through the present day, Tool Alliance® has consistently innovated new powder and grade combinations for demanding applications. We recognize that our material is the very first Significant Characteristic. By creating partnerships with a limited number of tungsten powder and cemented–carbide material suppliers, we are able to guarantee that our customers receive precision–tolerance tools ground from only the purest, finest grades available worldwide. The following photograph of Ultra–Carb® 2 demonstrates the complexity of the compound we commonly refer to as Cemented Carbide. Taken at magnification of 10,000 X through an SEM (Scanning Electron Microscope), the visible grains are tungsten while the cobalt binder appears as dark shadows. The largest tungsten grains appearing in the Ultra–Carb photo are less than one micron in size.





Cobalt Percentage: 12% Grain Size (µm): ≤ 1.9 Hardness: 90.2 HRa TRS (PSI): 540,000 Density (gm/cc): 14.1 Code C1 / K40



Cobalt Percentage: 10% Grain Size (µm): ≤ 1.0 Hardness: 91.6 HRa TRS (PSI): 480,000 Density (gm/cc): 14.5 Code C1 / K30



Cobalt Percentage: 11.5% Grain Size (µm): ≤ 1.9 Hardness: 91.0 HRa TRS (PSI): 350,000 Density (gm/cc): 12.9 Code C5 / P40 / M30

COMPONENT #2: The Grinding Process After selecting the best material available, Mil-Tec has perfected the manufacturing technology to optimize 100% of its physical properties. We call this process SmoothGrind®. Years in development, SmoothGrind is the result of a proprietary combination of material, abrasive, coolant, machine-tool, software, and grinding method technologies that produce cutting tools with superior qualitative characteristics. Sharper and longer lasting cutting edges, enhanced workpiece finishes, and improved lubricity are just some of the benefits brought to you by the latest indexable carbide rotary tooling advances from Mil-Tec. The following photograph displays a Mil-Tec insert featuring SmoothGrind (bottom) versus a major competitor's product (top). Our 100% precision-ground shearing, positive geometries create cutting forces much more similar to solid carbide milling than traditional pressed and sintered insert milling. Love your machine tool? Love your spindle? Treat them right and lower your maintenance costs at the same time you increase your throughput and improve your part finish.

SHEARDISBELIEF



OURSShears material with positive ground geometryCarries heat off with the chipLeaves the workpiece cool to the touch



THEIRS Pushes material with pressed geometry Punishes the workpiece Punishes the entire machine tool assembly

"REPROGRAM YOUR MILLING EXPECTATIONS"

Competitor's





SmoothEdge®









Freedom Cutter insert cutting edge magnified to display SE2 hone.

COMPONENT #3: The Edge Preparation Process

Our cutting edges are literally too sharp for certain materials. For our carbide inserts and now increasingly for our solid carbide round tools, proper edge preparation can yield huge productivity improvements to "out of the box" tool application. Using a treatment we call SmoothEdge® and performed on machine tools developed in our own R&D lab, we've taken the mystery out of tool "break-in" and provided a consistency that can be counted on time and again. The process for inserts selects from either SmoothEdge 1, a light brush hone, to SmoothEdge 2, which doubles the cycle. Both will sound and run smooth from the first cut and protect your tooling investment from unnecessary potential for chipping during your initial tooling paths. Big productivity gains can be achieved in certain applications as well due to improved chip formation and evacuation. In addition, a microblasting treatment using extremely fine aluminum oxide powder is provided with all coated inserts, further prepping the cutting edge. For aluminum grades and certain other non-ferrous materials, we eliminate the process to achieve maximum edge sharpness.

COMPONENT #4: The Tooling Process All the best physical ingredients are wasted unless they are all pulled together in a comprehensive system that maximizes their respective attributes. Mil-Tec calls this process SmoothContricity®. Our indexable products are designed to run more like solid carbide end mills versus the traditional pressed & sintered insert. SmoothContricity ensures that optimum results can be obtained by minimizing run-out (TIR), and providing industry-leading tolerances on diameter & radius. Combined, these attributes allow our consumers to reach full machining potential and position the cutting tool as a systematic contributor to process consistency and repeatability. Furthermore, you'll see benefits through the production stream like reduced maintenance costs, more uptime, better part finishes, and more.





★ MILTEC®★ ◎



Components of Guaranteed Quality continued from Page #3



Our coating @ 2,000X (top). Everybody else's (bottom).

SmoothCoat®

COMPONENT #5: The Coating Process The challenge of finding a coating method to leverage 100% of the inherent assets of our carbide grade and grinding technologies was difficult. What we finally discovered was such a perfect fit and so logical for our product lines that we invested heavily into the process we now call SmoothCoat®. Much more than simply the standard arc-deposited PVD coating, SmoothCoat involves sputter $multi-layering \ and \ a \ multi-step \ prep \ \& \ post \ operation \ called \ Micro-Blasting. \ The \ advantages \ of this \ procedure$ include relieving of tensile stresses underneath the cutting edge, increased stability of the coating surface, and perhaps most importantly, elevating SmoothGrind even another notch by leveling and activating the cemented carbide substrate. The result is a smooth, shiny, tough, and durable surface that can withstand tomorrow's machining requirements and outlast competitive coatings. Additionally, we've made it a standard feature on thousands of our standard catalog items. Our coating services are performed within our own factories for quality & extremely quick turnaround times.

Coating Availability Order by adding the suffix TA, TN, AT, TC, A1, D1, or D2 to the EDP #.



UnCoated

Material Hardness













PVD Diamond



Premium Coatings available

Standard Coatings available at "Coated" List Price



materials up to 70HRc including high-temp exotics, nickel based alloys, die & hardened steels

ideal for dry milling & high speed machining



materials up to 50HRc including steel, stainless steel, & cast iron

great choice for wide range of materials wet & dry applications

Multiple in-house coating systems offer superb quality and service.



excellent lubricity & wear



aluminum, titanium, & non-ferrous

tremendous lubricity / reduced weld allows for dry milling



aluminum, steel & stainless steel

> lower temp applications



extreme hardness for wearability in graphites, plastics, silicon alloys & other abrasive materials

sharpest diamond edge



extreme hardness for long life (10-50x) in graphite, carbon, composites & high silicon aluminum

> thickest diamond coating

SmoothCoat®

Material Abrasiveness





- Perfect for all material groups
- New Plus+ Geometry
- Hardened steel
- 3 insert shapes fit each pocket
- Unbeatable versatility
- Torx screw system
- Works with wide range of HP
- Uses precision-ground **Freedom Cutter inserts**
- From 2" to 12" diameter
- Cuts a 90° shoulder with SA90. SS90, or PS90 insert



The Freedom Cutter system features the ultimate in face-milling versatility. Each cutter body pocket accepts all three insert shapes, and each insert is available in a huge variety of geometries, radius sizes, carbide substrates, hones & coatings. Our cutter bodies are precision machined from hardened steel to exacting, repeatable tolerances. Special pocket geometry allows for eight indexes on Octagon & Round inserts, and four on Square. The Freedom Cutter milling system allows you to maximize your capabilities while minimizing your investment in cutter bodies. Now, the Freedom Cutter features our new Plus+ geometry, offering increased pocket density and superb body strength!



Select a Freedom Cutter Plus+ Shell Mill Style Body

All Freedom Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We manufacture standards & specials such as metric, coolant-thru, cartridge style, aluminum, or other cutter bodies with lead times as quick as one week.

Cutter Diameter	Bore	Keyway	Height	Insert Pockets	FC Plus+ Body Part Number	EDP Number	Body List Price USD
2"	3/4	5/16	1.725	3	FC-2-3	02001	\$220.00
2"	3/4	5/16	1.725	4	FC-2-4	02002	\$242.00
2"	1/2	1/4	1.725	4	FC-2-4NS	02000	\$264.00
2-1/2	1-1/4	1/2	1-7/8	4	FC-2.5-4	02003	\$302.50
2-1/2	1"	.380	1-7/8	4	FC-2.5-4NS	02004	\$302.50
3"	1-1/4	1/2	1-7/8	4	FC-3-4	02005	\$357.50
3"	1"	.380	1-7/8	4	FC-3-4NS	02006	\$357.50
3"	1-1/4	1/2	1-7/8	5	FC-3-5	02007	\$379.50
3"	1"	.380	1-7/8	5	FC-3-5NS	02008	\$379.50
3"	3/4	5/16	1-7/8	5	FC-3-5NS-3/4	02025	\$379.50
3"	1-1/4	1/2	1-7/8	7	FC-3-7	02009	\$401.50
3"	1"	.380	1-7/8	7	FC-3-7NS	02010	\$401.50
3-1/2	1-1/2	5/8	1-7/8	5	FC-3.5-5	02011	\$423.50
3-1/2	1"	.380	1-7/8	5	FC-3.5-5NS-1	02225	\$423.50
3-1/2	1-1/4	1/2	1-7/8	5	FC-3.5-5NS-1.25	02226	\$423.50
4"	1-1/2	5/8	1-7/8	6	FC-4-6	02012	\$495.00
4"	1-1/2	5/8	1-7/8	8	FC-4-8	02013	\$528.00
4"	1-1/4	1/2	1-7/8	6	FC-4-6NS-1.25	02027	\$495.00
4"	1"	.380	1-7/8	6	FC-4-6NS-1	02026	\$495.00
4-1/2	1-1/2	5/8	1-7/8	6	FC-4.5-6	02014	\$577.50
5"	1-1/2	5/8	1.950	6	FC-5-6	02015	\$616.00
5"	1-1/2	5/8	1.950	9	FC-5-9	02016	\$649.00
5"	1"	.380	1.950	6	FC-5-6NS-1	02028	\$616.00
5"	1-1/4	1/2	1.950	6	FC-5-6NS-1.25	02029	\$616.00
6"	1-1/2	5/8	1.950	8	FC-6-8	02017	\$682.00
6"	1-1/2	5/8	1.950	10	FC-6-10	02018	\$726.00
6"	1"	.380	1.950	8	FC-6-8NS-1	02030	\$682.00
6"	1-1/4	1/2	1.950	8	FC-6-8NS-1.25	02031	\$682.00





Select a Freedom Cutter Plus+ Large Diameter Face Mill Style Body The Large Diameter Freedom Cutter Face Mill features a 4" bolt circle pattern. The CB (counterbore) design is for direct attachment to the spindle face (counterbore diameter is 5-1/16"), while the FB (flat back) is used with standard shell mill holders.

Cutter Diamete	er Bore	Keyway	Height	Insert Pockets	FC Plus+ Large Body Part Number	EDP Number	Body List Price USD	
8"	2"	3/4	2"	9	FC-8-9NS-FB	02219	\$968.00	
8"	2-1/2	1"	2"	9	FC-8-9-FB	02020	\$968.00	
10"	2-1/2	1"	2-1/2	10	FC-10-10-CB	02021	\$1210.00	
10"	2-1/2	1"	2-1/2	10	FC-10-10-FB	02022	\$1210.00	
12"	2-1/2	1"	2-1/2	11	FC-12-11-FB	02023	\$1452.00	
14"	2-1/2	1"	2-1/2	14	FC-14-14-FB	02034	\$2475.00	
16"	2-1/2	1"	2-1/2	16	FC-16-16-FB	02035	\$3355.00	

★ MILTEC®★ ◎

The Mil-Tec Freedom Cutter® Plus+45 Series

The Freedom Cutter Plus+45 Milling System is a 45° lead anale shell mill that utilizes square shaped Freedom **Cutter Inserts. Because our inserts** have precision around geometries ranging from the SA (Super Aluminum) to our workhorse NP grind, the new Plus+45 is the most versatile 45° lead face mill in the industry. The Plus+45 powerful combination of attributes generates maximum metal removal rates in the toughest alloys!



The Plus+45 uses standard Square Freedom Cutter Inserts up to .125 maximum radius.

- 45° lead angle for smooth cut
- Perfect for all material groups including toughest alloys
- Precise tolerances
- Hardened steel
- Accepts standard square **Freedom Cutter inserts**
- **Utilizes FC insert geometry**
- Torx screw system
- Depths of cut up to .400
- Unbeatable productivity
- From 2" to 6" diameter

Select a Freedom Cutter Plus+45 Shell Mill Style Body


All Freedom Cutter Plus+45 Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We manufacture standards & specials such as metric, coolant-thru, cartridge style, aluminum, or other cutter bodies with lead times as quick as one week. *Cutter diameter is measured to centerline of insert.



	Cutter Diameter*	Bore	Keyway	Height	Insert Pockets	FC Plus+45 Body Part Number	EDP Number	Body List Price USD
	2"	3/4	5/16	2"	4	FC45-2-4	02050	\$242.00
ķ	3"	1-1/4	1/2	2"	6	FC45-3-6	02051	\$385.00
	3"	1"	.380	2"	6	FC45-3-6NS	02052	\$401.50
	4"	1-1/2	5/8	2"	8	FC45-4-8	02053	\$528.00
	5"	1-1/2	5/8	2"	9	FC45-5-9	02054	\$649.00
	6"	1-1/2	5/8	2"	10	FC45-6-10	02055	\$726.00

Mil-Tec Freedom Cutter Plus+45 Specialized Square Inserts with Wiper flats

Mil-Tec now offers a Wiper insert for the Plus+45 Series. This new insert geometry can semi-finish and finish. Milled workpiece surfaces as low as 15RA are now possible by combining a traditional wiper design with our high positive shearing cutter pocket.



Plus+45 Wiper Insert	EDP#	Price	Application
S-SS-W45-20UC			Semi-Finish / Finish • Aluminum
Z-SA-W45-20UC			Finish • Aluminum
S-SS-W45-51TA	41011TA	\$15.50	Semi-Finish / Finish • Steel & Stainless
S-PS-W45-51TA	S-PS-W45-51TA 41012TA		Semi-Finish / Finish • Steel, Stainless & Exotics
S-PS-W45-21TA	41021TA	\$15.50	Semi-Finish / Finish • Stainless & Exotics



Body List

The Mil-Tec High Feed Freedom Cutter® Please see Technical Information on Page #29.

EDP

Select a High Feed (HFC) Freedom Cutter (Shank & Shell Mill Styles)

Shank

Cutter

The new Mil-Tec High Feed Freedom Cutter brings incredible metalworking performance to smaller CNC's & 40-taper spindles milling Steels & Stainless (up to 300 IPM) and Titanium & Exotics (up to 500 SFPM @ 50 IPM). Recommended High Feed inserts are listed below.



Diameter	Diameter	OAL		Pockets	Part Number	Number	Price USD
1-1/2	1"	4"		2	HFC-1.5-2-8	02152	\$231.00
1-1/2	1-1/4	4"		2	HFC-1.5-2-10	02153	\$231.00
2"	1"	4"		3	HFC-2-3-8	02154	\$341.00
2"	1-1/4	4"		3	HFC-2-3-10	02155	\$341.00
Cutter Diameter	Bore	Keyway	Height	Insert Pockets	HFC Shell Body Part Number	EDP Number	Body List Price USD
2"	3/4	5/16	1.725	4	HFC-2-4ML	02165	\$275.00
2-1/2	1"	.380	1-7/8	4	HFC-2.5-4NS	02156	\$357.50
2-1/2	1-1/4	1/2	1-7/8	4	HFC-2.5-4ML	02157	\$357.50
3"	1"	.380	1-7/8	5	HFC-3-5NS	02158	\$418.00
3"	1-1/4	1/2	1-7/8	5	HFC-3-5ML	02159	\$418.00
4"	1-1/2	5/8	1-7/8	6	HFC-4-6ML	02160	\$550.00

Insert

Ideal **High Feed** Inserts New for 2020, A2 coating doubles the thickness for

This insert is recommended for roughing steel, Stainless, and cast iron.

EDP#

72752AT

72752A2



Sauare

Sauare



D)	Negative / Positive Frustroconical Land SmoothGrind®	

This insert is ideal for roughing
Stainless, Titanium, Inconel, an
high-temp alloys.

HFC Shank Body





EDP#	Shape	Radius	# indexes	Price
63712AT	Shape Square 90	.125	2	\$15.50





Page#7

rev2021.1



Freedom Cutter® Specialty Styles • Freedom Cutter with Dedicated Round insert (FCDR) • Freedom Cutter with Low Profile cutter body (FCLP & FCLPA)

The Freedom Cutter is available in customized solutions for difficult milling applications. These specialized cutter bodies utilize the same insert family as all Freedom Cutter series and are precisioned machined in our factory from tough heat treated steel.

Select a Freedom Cutter with Dedicated Round insert support (FCDR) Cutter Body

This Freedom Cutter style is used only with Round inserts. The pocket is precision machined to perfectly match a round Freedom Cutter insert and utilize our unique Mil-Loc screw system for tight tolerance, high-speed milling utilizing the Round geometry. Cutter diameters are based on the OD of the insert. Insert radius is .312 and features eight indexes.



Cutter Diameter*	Bore	Keyway	Height	Insert Pockets	FC Dedicated Round Body Part Number	EDP Number	Body List Price USD
2"	3/4	5/16	1.725	3	FCDR-2-3	02170	\$264.00
3"	1-1/4	1/2	1-7/8	5	FCDR-3-5	02171	\$390.50
4"	1-1/2	5/8	1-7/8	6	FCDR-4-6	02173	\$506.00
5"	1-1/4	1/2	1.950	6	FCDR-5-6	02175	\$638.00
6"	1-1/2	5/8	1.950	8	FCDR-6-8	02176	\$704.00
8"	2-1/2	1"	2"	9	FCDR-8-9**	02178	\$990.00
10"	2-1/2	1"	2"	10	FCDR-10-10**	02179	\$1254.00
12"	2-1/2	1"	2"	11	FCDR-12-11**	02180	\$1496.00





** 4" Bolt circle pattern

Body List



3 individual indexes Round (R)

Cutter

Utilizing standard Round Freedom Cutter inserts, the FCDR features totally reengineered geometry to maximize performance in Steels, Stainless, Titanium, and a wide range of High-Temp alloys. The round pocket provides increased strength and insert support. New geometry increases the shear angle resulting in increased metal removal rates and longer tool life.

Select a Freedom Cutter with a Low Profile & reduced weight (FCLP) Steel Cutter Body The Low Profile Freedom Cutter is precision machined from heat-treated steel with reduced body mass and undersized bores for light and medium duty applications on smaller capacity CNC's. Total cutter weight is reduced 40% to 60% dependent upon diameter. The FCLP features the traditional Freedom Cutter pocket and accepts all standard Freedom Cutter inserts.



average weight reduction from traditional Freedom Cutter

	Diameter	Bore	Keyway	Height	Weight	Pockets	Body Part Number	Number	Price USD
	4"	1-1/4	1/2	1-5/8	1 lb 12 oz	6	FCLP-4-6	02036	\$495.00
	4"	1-1/2	5/8	1-5/8	1 lb 14 oz	8	FCLP-4-8	02037	\$528.00
	5"	1-1/4	1/2	1-5/8	3 lb	6	FCLP-5-6	02038	\$616.00
	5"	1-1/2	5/8	1-5/8	2 lb 9 oz	6	FCLP-5-6-2	02045	\$616.00
	5"	1-1/2	5/8	1-5/8	3 lb	9	FCLP-5-9	02039	\$649.00
	6"	1"	.380	1-5/8	3 lb 7 oz	5	FCLP-6-5NS	02046	\$682.00
	6"	1-1/4	1/2	1-5/8	3 lb 9 oz	8	FCLP-6-8	02040	\$682.00
	6"	1-1/2	5/8	1-5/8	3 lb	9	FCLP-6-9	02041	\$726.00
	7"	1-1/2	5/8	1-5/8	5 lb 8 oz	9	FCLP-7-9	02042	\$847.00
2	8"	1-1/2	5/8	1-5/8	7 lb	10	FCLP-8-10	02043	\$968.00
ı	10"	1-1/2	5/8	1-5/8	12 lb 12 oz	10	FCLP-10-10	02044	\$1210.00
	12"	1-1/2	5/8	1-5/8	24 lb	11	FCLP-12-11	02047	\$1320.00

Insert

FC Low Profile

Now available in an even lighter weight design, the (FCLPA) Aluminum Cutter Body This Low Profile Freedom Cutter is precision machined from aluminum, taking the reduced weight design to another level. The new FCLPA is designed for finishing cuts in plastics, non-metals, and non-ferrous alloys. Standard FC inserts can be used, including the SS Super Shear, D1 & D2 diamond coated, and PCD-tipped. The slim, lightweight design with small bore sizes are perfect for small CNC's and allows for a single finishing cut with a large cutter.



Precision milled from
solid aluminum for a super
lightweight cutter body

11	n u siliyle i	1111311111	g cut with	u iui ye c	utter.	_			
	Cutter Diameter	Bore	Keyway	Height	Weight	Insert Pockets	FC Low Profile Body Part Number	EDP Number	Body List Price USD
	4"	1"	.380	1-5/8	11 oz	3	FCLPA-4-3NS	02300	\$495.00
١	4"	1-1/4	1/2	1-5/8	11 oz	3	FCLPA-4-3	02301	\$495.00
	5"	1"	.380	1-5/8	14 oz	3	FCLPA-5-3NS	02302	\$616.00
	5"	1-1/4	1/2	1-5/8	14 oz	3	FCLPA-5-3	02303	\$616.00
	6"	1"	.380	1-5/8	1 lb 5 oz	3	FCLPA-6-3NS	02304	\$682.00
	6"	1-1/4	1/2	1-5/8	1 lb 5 oz	3	FCLPA-6-3	02305	\$682.00
	7"	1-1/4	1/2	1-5/8	1 lb 13 oz	5	FCLPA-7-5	02306	\$847.00
	8"	1-1/4	1/2	1-5/8	2 lb 3 oz	5	FCLPA-8-5	02307	\$968.00



Page # 8 rev2021.1

phone 800.564.5832 / fax 866.244.0298



Body List

Price USD

\$192.50

\$214.50

\$286.00 \$357.50

\$418.00

\$434.50

Body List

Price USD

\$220.00 \$357.50

\$495.00

\$682.00

Number 02144

02145

02146

02147 02148

02149

EDP

Number

02140

02141

02142

02143



Freedom Cutter® Specialty Styles

The Freedom Cutter is available in customized solutions for difficult milling applications. These specialized cutter bodies utilize the same insert family as all Freedom Cutter series.

- Freedom Cutter with Extended Reach Shank (FCR)
- Freedom Cutter with Integrated R8 Shank (FC8)
- Freedom Cutter that Ramps & Plunges (RPX)
- Freedom Cutter with Coolant Holes (FCC) Shank diameter tolerance -.0002 / -.0005

Select a Freedom Cutter with Extended Reach (FCR) Shank Style Body

This Freedom Cutter offers extended reach capabilities, bringing the benefits of the FC milling system to a wide variety of application



Cutter Diameter	Shank	Head Length	OAL	Insert Pockets	FC Shank Body Part Number	EDP Number	Body List Price USD
1"	3/4	1-3/4	4"	1	FCR-1-1-6	02070	\$110.00
1"	1-1/4	1-3/4	4"	1	FCR-1-1-10	02071	\$110.00
1"	1"	1-3/4	7"	1	FCR-1-1-8E	02072	\$143.00
1"	1-1/4	1-3/4	7"	1	FCR-1-1-10E	02073	\$187.00
1-1/4"	3/4	1-3/4	4"	2	FCR-1.25-2-6	02074	\$165.00
1-1/4"	1"	1-3/4	4"	2	FCR-1.25-2-8	02075	\$165.00
1-1/4"	1-1/4	1-3/4	4"	2	FCR-1.25-2-10	02076	\$165.00
1-1/4"	1-1/4	1-3/4	7"	2	FCR-1.25-2-10E	02077	\$198.00
1-1/2"	3/4	1-3/4	4"	3	FCR-1.5-3-6	02078	\$209.00
1-1/2"	1"	1-3/4	4"	3	FCR-1.5-3-8	02079	\$209.00
1-1/2"	1"	1-3/4	7"	3	FCR-1.5-3-8E	02088	\$209.00
1-1/2"	1-1/4	1-3/4	4"	3	FCR-1.5-3-10	02080	\$209.00
1-1/2"	1-1/4	1-3/4	7"	3	FCR-1.5-3-10E	02081	\$247.50
1-3/4"	3/4	1-3/4	4"	3	FCR-1.75-3-6	02082	\$242.00
1-3/4"	1-1/4	1-3/4	4"	3	FCR-1.75-3-10	02083	\$242.00
1-3/4"	1-1/4	1-3/4	7"	3	FCR-1.75-3-10E	02084	\$280.50
2"	3/4	1-3/4	4"	4	FCR-2-4-6	02089	\$330.00
2"	1"	1-3/4	4"	4	FCR-2-4-8	02087	\$330.00
2"	1-1/4	1-3/4	4"	3	FCR-2-3-10	02085	\$286.00
2"	1-1/4	1-3/4	4"	4	FCR-2-4-10	02086	\$308.00

Select a Freedom Cutter with integral R8 Shank (FC8) Style Body

This Freedom Cutter features a one-piece R8 shank, bringing the versatility of the FC milling system to small shops, maintenance rooms, repair facilities, etc. You'll be amazed at the productivity our free-cutting, positive geometry brings to low-horsepower mills!



Cutter Diameter	OAL	Insert Pockets	FC R8 Shank Body Part Number	EDP Number	Body List Price USD
1-1/2"	5-1/8	3	FC8-1.5	02090	\$220.00
2"	5-1/8	3	FC8-2.0	02091	\$286.00
3"	5-1/8	5	FC8-3.0	02092	\$495.00

Select a Freedom Cutter that Ramps & Plunges (RPX) w/ Shank or Shell Style Body This Freedom Cutter style can ramp and plunge. Ramp up to 30° and .187 DOC, and plunge to .187 DOC. Standard milling can also be accomplished; 8-index geometries (Octagon & Round) have a maximum .150 DOC, while 4-index geometries (Square) go up to .312 depth. **RPX Shank Style Body** Cutter **EDP**

Insert



Diameter	Shank	Length	OAL	Pockets	Part Number	
1-1/2	1-1/4	1"	4"	2	RPXS-1.5-2-10	
1-3/4	1-1/4	1"	4"	2	RPXS-1.75-2-10	
2"	1-1/4	1.55	4"	3	RPXS-2-3-10	
2-1/2	1-1/4	1.55	4"	3	RPXS-2.5-3-10	
3"	1-1/4	1.55	4"	4	RPXS-3-4-10	
3-1/2	1-1/2	1.55	4"	4	RPXS-3.5-4-12	
Cutter Diameter	Bore	Keyway	Height	Insert Pockets	RPX Shell Mill Body Part Number	ı
2"	3/4	5/16	1.725	3	RPX-2-3	
3"	1"	.380	1-7/8	4	RPX-3-4	
4"	1-1/2	5/8	1-7/8	6	RPX-4-6	
6"	1-1/9	5/8	1.050	Ω	DDY_6_8	

Select a Freedom Cutter with Coolant Hole (FCC) Shell Mill Style Body

Head

This Freedom Cutter style is designed for both air and fluid coolant technologies. A custom cap screw is included with the 2" and 3" FCC, while a special 1-1/2" CBS bolt is required for larger diameters.



Cutter Diameter	Bore	Keyway	Height	Insert Pockets	FC Coolant Body Part Number	EDP Number	Body List Price USD
2"	3/4	5/16	1-3/4	4	FCC-2-4	02100	\$330.00
3"	1-1/4	1/2	1-7/8	5	FCC-3-5	02101	\$489.50
3"	1"	.380	1-7/8	5	FCC-3-5-NS	02102	\$489.50
4"	1-1/2	5/8	1-7/8	6	FCC-4-6	02103	\$627.00
6"	1-1/2	5/8	1.950	8	FCC-6-8	02104	\$858.00





Page#9

EDP

Number

02060

Body List Price USD

\$192.50

rev2021.1

Freedom Cutter® Specialty Styles • Freedom Cutter with Chamfer Angles (FCH & FDCH)



The Freedom Cutter is available in customized solutions for difficult milling applications. These specialized cutter bodies utilize the same insert family as all Freedom Cutter series.

Dedicated Finishing Freedom Cutter (DFC)

• Freedom Cutter with Square Insert Support (FCS)

• Freedom Cutter with Aluminum Body Design (FCA) Shank diameter tolerance -.0002 / -.0005

Select a Freedom Cutter that Chamfers on 1 (FCH) or 2 (FDCH) sides with Shank Style Body This Freedom Cutter style chamfers up to a .600 width with a standard square FC insert. Length is measured to tip of insert, and listed diameter is from front tip of insert to opposing front tip.



V!	
450	
(2 x 45°)	

Cutter

Diameter

Included Angle	Cutter Diameter	Shank	OAL	Insert Pockets	FC Chamfer Body Part Number	EDP Number	Body List Price USD
60°	1"	3/4	3-1/2	2	FCH30-8-2-6	02110	\$176.00
82°	1"	3/4	3-1/2	2	FCH41-8-2-6	02115	\$176.00
90°	7/8	3/4	3-1/2	2	FCH45-7-2-6	02111	\$176.00
90°	7/8	1"	3-1/2	2	FCH45-7-2-8	02112	\$176.00
90°	1-1/2	1"	3-1/2	2	FCH45-12-2-8	02114	\$236.50
100°	7/8	3/4	3-1/2	2	FCH50-7-2-6	02116	\$176.00
120°	7/8	3/4	3-1/2	2	FCH60-7-2-6	02113	\$176.00
90° x 2	2"	3/4	3-1/2	2	FDCH-45-16-2-6	02119	\$250.00

DFCA Shank Body

Part Number

DFCA-1-1-6



nev

FDCH

Select a Dedicated Finishing (DFC) Freedom Cutter (Shank & Shell Mill Styles) The DFC Freedom Cutter in conjunction with the required Square NP Geometry acts as a dedicated finisher / wiper

Insert

Pockets

combination in applications that demand exceptional surface finish and flatness using our NP inserts w/ .062 radius. Use #72553TA for steels & #72520UC for aluminum.

Shank

Diameter




1"		4"	1-1/4	1	DFCA-1-1-10	02061	\$192.50
Cutter Diameter	Height	Keyway	Bore	Insert Pockets	DFCA Shell Body Part Number	EDP Number	Body List Price USD
2"	1.725	5/16	3/4	2	DFCA-2-2	02062	\$220.00
3"	1-7/8	1/2	1-1/4	2	DFCA-3-2	02063	\$330.00
3"	1-7/8	.380	1"	2	DFCA-3-2NS	02064	\$330.00
4"	1-7/8	5/8	1-1/2	2	DFCA-4-2	02065	\$440.00
5"	1.950	5/8	1-1/2	2	DFCA-5-2	02066	\$550.00
6"	1.950	5/8	1-1/2	2	DFCA-6-2	02067	\$660.00
8"	2"	1"	2-1/2	2	DFCA-8-2FB	02068	\$880.00

Select a Freedom Cutter with Square Insert Support (FCS) Shell Mill Style Body

OAL

4"

This Freedom Cutter style is used only with Square inserts. The pocket shoulder is extended to provide additional corner support for dedicated high-speed milling utilizing the Square geometry.



Cutter Diameter	Bore	Keyway	Height	Pockets	FC Sq. Support Body Part Number	EDP Number	Body List Price USD
2"	3/4	5/16	1.725	3	FCS-2-3	02120	\$242.00
2"	3/4	5/16	1.725	4	FCS-2-4	02121	\$269.50
2-1/2	1-1/4	1/2	1-7/8	4	FCS-2.5-4	02122	\$341.00
2-1/2	1"	.380	1-7/8	4	FCS-2.5-4-NS	02123	\$341.00
3"	1-1/4	1/2	1-7/8	4	FCS-3-4	02124	\$385.00
3"	1-1/4	1/2	1-7/8	5	FCS-3-5	02125	\$412.50
3"	1"	.380	1-7/8	5	FCS-3-5-NS	02126	\$412.50
4"	1-1/2	5/8	1-7/8	6	FCS-4-6	02127	\$550.00
5"	1-1/2	5/8	1.950	6	FCS-5-6	02128	\$682.00
6"	1-1/2	5/8	1.950	8	FCS-6-8	02129	\$770.00

Select a Freedom Cutter with Aluminum construction (FCA) Shell Mill Style Body This Freedom Cutter style is machined entirely from 6061 T6 Aluminum. It is an ideal solution for router and restricted spindle-weight applications.



Cutter Diameter	Bore	Keyway	Height	Weight	Insert Pockets	FC Aluminum Body Part Number	EDP Number	Body List Price USD
2"	3/4	5/16	1.725	5 oz	3	FCA-2-3	02130	\$242.00
2"	3/4	5/16	1.725	5 oz	4	FCA-2-4	02131	\$269.50
3"	1-1/4	1/2	1-7/8	12 oz	5	FCA-3-5	02132	\$412.50
3"	1"	.380	1-7/8	12 oz	5	FCA-3-5-NS	02133	\$412.50
4"	1-1/2	5/8	1-7/8	1 lb	6	FCA-4-6	02134	\$550.00
6"	1-1/2	5/8	1.950	3 lb	8	FCA-6-8	02135	\$770.00
8"	2-1/2	1"	2"	5 lb	9	FCA-8-9	02136	\$1045.00
10"	2-1/2	1"	2-1/2	10 lb	10	FCA-10-10	02137	\$1320.00
10"	2-1/2	1"	2-1/2	10 lb	10	FCA-10-10	02137	\$1320.00

★MIL-TEC® ★



Mil-Tec Freedom Cutter® Inserts Nomenclature Guide & Technical Information















Insert Description = O-SS-062-2-1-TA, or OSS06221TA (every Freedom Cutter Insert has 10 characters total) Note that the combination of Carbide, Sedge Prep & Coating constitute the Insert Grade ("21TA" in this example)



Insert Shape Availability order as O, S, Z, or R







Square 90 (Z)



Each arrow represents a cutting edge index.

Octagon (O) = 8 indexes Square (S) = 4 indexes Square 90 (Z) = 2 indexes Round (R) = 8 indexes



Geometry Availability order as SS, PS, NP, MS, GP, or SA







moothGrind®

Flat top grind for all materials.



Medium positive grind for steel, stainless, and exotics. The perfect "all-application" geometry.



Maximum high positive grind for milling 90° corner in Aluminum. Available in Square 90 (Z) shape.



Strongest insert and designed for heavy feed rates. Ideal for steel, stainless, & heat-treated alloys.



Super Shear grind for milling 90° corner available in Square 90 (Z).



Molded and ground chip control: ideal for stainless & exotics including titanium and inconel.



Power Shear grind for milling 90° corner available in Square 90 (Z).



Radius Availability order as 000, 005, 016, 032, 047, 062, 093, 125, 187, 250, or 312

Octagon shape available in 062 only; Round is 312 by default.

Radius =	000	005	016	032	047	062	093	125	187	250	312
decimal	.000	.005	.016	.032	.047	.062	.093	.125	.187	.250	.312
metric	0.00 mm	0.13 mm	0.40 mm	0.81 mm	1.20 mm	1.57 mm	2.36 mm	3.18 mm	4.75 mm	6.35 mm	7.92 mm



Carbide Classification Availability order as 1, 2, or 5



Toughest Carbide All applications + Exotics



Hardest Carbide Cast Iron, Stainless Low Carbon Steels



Tough + Hard Carbide Steels, Stainless Hard materials

Please note that the combination of Carbide, Edge Prep & Coating constitute the Insert Grade, i.e. "21TA"



Edge Prep Availability order as 0, 1, or 2

SmoothEdge® C

No Hone, Upsharp = 0 Razor sharp for max shearing Plastics, Aluminum, Non-Ferrous

Light Hone = 1 Added edge strength w/high shear General Purpose for most materials

Heavy Hone = 2 Strongest cutting edge Exotics, PH Stainless, Heat treated alloys



Coating Availability order as UC, TA, TN, A1, AT, D1, D2, or TC

















UnCoated

PVD Diamond

CVD Diamond

• All selections not available • Stocked catalog standards are listed by EDP# on pages #12 to #17 • Specials available upon quotation Mil-Tec Freedom Cutter inserts can be ordered in hundreds of variations. The ability to match a specific application with geometry, coating, edge prep and carbide substrate make the Freedom Cutter the perfect application-specific milling system.



Mil-Tec Freedom Cutter® Insert Pricing & Availability • All Freedom Cutter Inserts have a 5/8" Inscribed Circle and are 3/16" thick • Inserts are sold in packs of 10

Prices displayed are for standard FC inserts with standard coating; premium prices apply for PCD, Silicon Nitride and D2 coatings.

Octagon



UnCoated: \$14.50 USD each Only\$1.81 per uncoated index!

Coated: \$15.50 USD each Less than \$1.94 per coated index!



All Octagon Freedom Cutter inserts and geometries feature the .062 Radius on all 8 index corners.



Sample Order: O-NP-062-5-1-TA or ONP06251TA





















UnCoated: \$14.50 USD each Only \$3.63 per uncoated index!

Coated: \$15.50 USD each Less than \$3.88 per coated index!



All Square Freedom Cutter inserts are available with 9 different corner radii and have either 4 (S) or 2 (Z) indexes.

Sample Order: S-SS-005-1-0-UC or SSS00510UC



cuts 90° with 4 indexes:




cuts 90° cutting with 2 indexes:











UnCoated: \$14.50 USD each Only \$1.81 per uncoated index!

Coated: \$15.50 USD each Less than \$1.94 per coated index!



All Round Freedom Cutter inserts and geometries feature our patented Mil-Loc locating system, which assures solid pocket positioning and 8 total indexes. The Round insert by default features a .312 radius.



Sample Order: R-PS-312-2-1-TA or RPS31221TA







\$134.50

\$182.50

22815

22817



Freedom Cutter® Spare Parts

Wrenches, Screws, Arbors & More



R8 shell mill arbor 1-1/4" pilot

R8 shell mill arbor 1-1/2" pilot

1-1/4-2.20'

1-1/2-2.21"







Tighten to 28 - 30 Inch Pounds

★ MILTEC® ★



Mil-Tec Freedom Cutter® Inserts: Octagon

- SmoothGrind® precision grinding
- SmoothCoat® PVD hard coatings
- 8 indexes for value / .062 radius
- Positive Geometry / free cutting
- 5 Different geometries
- Fits all Freedom Cutter pockets
- 5/8" IC with 3/16" thickness
- Same insert works with Fractional and Metric bodies



The Mil-Tec Octagon Freedom Cutter insert features eight indexes and is available in five different precision ground geometries. Inserts are sold in packs of ten.

Octagons feature a .062 radius on all eight indexes.

Note FC inserts are sold in packs of 10. List prices are for individual inserts. EDP#'s listed below.

FC Insert List Prices

 UnCoated
 \$14.50

 Coated
 \$15.50





High positive grind available in all shapes. Ideal for aluminum, non-ferrous, plastic, & non-metals.



Medium positive grind for steel, stainless, and exotics. The perfect "all-application" geometry.



Strongest insert and designed for heavy feed rates. Ideal for steel, stainless. & heat-treated alloys.



Molded and ground chip control; ideal for stainless & exotics including titanium and inconel.



Flat top grind for all materials.

*Class/					
Edge Prep	UnCoated	TIAIN	TiN	TiB2	ALTIN
1-0	50010UC	50010TA	50010TN	50010A1	50010AT
1-1	50011UC	50011TA	50011TN	50011A1	50011AT
1-2	50012UC	50012TA	50012TN	50012A1	50012AT
2-0	50020UC	50020TA	50020TN	50020A1	50020AT
2-1	50021UC	50021TA	50021TN	50021A1	50021AT
2-2	50022UC	50022TA	50022TN	50022A1	50022AT
5-0	50050UC	50050TA	50050TN	50050A1	50050AT
5-1	50051UC	50051TA	50051TN	50051A1	50051AT
5-2	50052UC	50052TA	50052TN	50052A1	50052AT
1-0	60010UC	60010TA	60010TN	60010A1	60010AT
1-1	60011UC	60011TA	60011TN	60011A1	60011AT
1-2	60012UC	60012TA	60012TN	60012A1	60012AT
2-0	60020UC	60020TA	60020TN	60020A1	60020AT
2-1	60021UC	60021TA	60021TN	60021A1	60021AT
2-2	600210C	60021TA	60021TN	60022A1	60022AT
5-0	60050UC	60050TA	60050TN	60050A1	60050AT
5-1	60051UC	60051TA	60051TN	60051A1	60051AT
5-2	60052UC	60052TA	60052TN	60052A1	60052AT
1-0	70010UC	70010TA	70010TN	70010A1	70010AT
1-1	70011UC	700101A 70011TA	70010TN 70011TN	70010A1	70010A1 70011AT
1-2	70011UC	700111A	700111N 70012TN	70011A1	70011AT
2-0	70020UC	700121A 70020TA	70012TN 70020TN	70020A1	70020AT
2-1	700200C 70021UC	70020TA 70021TA	70020TN 70021TN	70020A1	70020AT
2-2	700210C 70022UC	70021TA	70021TN 70022TN	70021A1	70021AT
5-0	70050UC	70050TA	70050TN	70050A1	70050AT
5-1	70051UC	70050TA	70050TN 70051TN	70050A1	70050AT
5-2	700510C	70051TA	70051TN	70052A1	70051AT
J-2	/00320C	/00JZIA	/00321N	/0032A1	/00J2A1
1-0	80010UC	80010TA	80010TN	80010A1	80010AT
1-1	80011UC	80011TA	80011TN	80011A1	80011AT
1-2	80012UC	80012TA	80012TN	80012A1	80012AT
5-0	80050UC	80050TA	80050TN	80050A1	80050AT
5-1	80051UC	80051TA	80051TN	80051A1	80051AT
5-2	80052UC	80052TA	80052TN	80052A1	80052AT
1-0	90010UC	90010TA	90010TN	90010A1	90010AT
1-1	90011UC	90011TA	90011TN	90011A1	90011AT
1-2	90012UC	90012TA	90012TN	90012A1	90012AT
2-0	90020UC	90020TA	90020TN	90020A1	90020AT
2-1	90021UC	90021TA	90021TN	90021A1	90021AT
2-2	90022UC	90022TA	90022TN	90022A1	90022AT
5-0	90050UC	90050TA	90050TN	90050A1	90050AT
5-1	90051UC	90051TA	90051TN	90051A1	90051AT
5-2	90052UC	90052TA	90052TN	90052A1	90052AT
	3003200	JOUJEIA	JUUJEIN	JUUJEAI	JOUJERT

*Carbide Classification Availability order as 1, 2, or 5





Hardest Grade Cast Iron, Stainless Low Carbon Steels



Tough + Hard
Steels, Stainless
Hard materials

*Edge Prep Availability order as 0, 1, or 2

SmoothEdge® 0

No Hone, Upsharp = 0 Razor sharp for max shearing Plastics, Aluminum, Non-Ferrous

SmoothEdge® 1

Light Hone = 1 Added edge strength w/high shear General Purpose for most materials SmoothEdge® 2

Heavy Hone = 2 Strongest cutting edge Exotics, PH Stainless, Heat treated alloys

Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "52AT" or 5-2-AT).





Mil-Tec Freedom Cutter® Inserts: Round

- SmoothGrind® precision grinding
- SmoothCoat® PVD hard coatings
- 8 indexes for value / .312 radius
- Positive Geometry / free cutting
- 4 Different geometries
- Fits all Freedom Cutter pockets
- 5/8" IC with 3/16" thickness
- Exclusive Mil-Loc indexing screw
- Same insert works with Fractional and Metric bodies



Round (R)

The Mil-Tec Round Freedom Cutter insert features eight indexes and is available in four different precision ground geometries. Inserts are sold in packs of ten.

Note: 8 indexes for Axial Depth below .090; 4 indexes for greater depths. Rounds feature a .312 radius on all eight indexes.

> Note FC inserts are sold in packs of 10. List prices are for individual inserts.

FC Insert **List Prices** UnCoated \$15.50 Coated

See Figure #3 on Page 19 for Mil-Loc screw info





High positive arind available in all shapes. Ideal for aluminum, nonferrous, plastic, & non-metals.



Medium positive grind for steel stainless, and exotics. The perfect "all-application" geometry.



Strongest insert and designed for heavy feed rates. Ideal for steel, stainless, & heat-treated alloys.



Flat top grind for all materials.

*Class/					
Edge Prep	UnCoated	TIAIN	TiN	TiB2	ALTIN
1-0	51010UC	51010TA	51010TN	51010A1	51010AT
1-1	51011UC	51011TA	51011TN	51011A1	51011AT
1-2	51012UC	51012TA	51012TN	51012A1	51012AT
2-0	51020UC	51020TA	51020TN	51020A1	51020AT
2-1	51021UC	51021TA	51021TN	51021A1	51021AT
2-2	51022UC	51022TA	51022TN	51022A1	51022AT
5-0	51050UC	51050TA	51050TN	51050A1	51050AT
5-1	51051UC	51051TA	51051TN	51051A1	51051AT
5-2	51052UC	51052TA	51052TN	51052A1	51052AT
1-0	61010UC	61010TA	61010TN	61010A1	61010AT
1-1	61011UC	61011TA	61011TN	61011A1	61011AT
1-2	61012UC	61012TA	61012TN	61012A1	61012AT
2-0	61020UC	61020TA	61020TN	61020A1	61020AT
2-1	61021UC	61021TA	61021TN	61021A1	61021AT
2-2	61022UC	61022TA	61022TN	61022A1	61022AT
5-0	61050UC	61050TA	61050TN	61050A1	61050AT
5-1	61051UC	61051TA	61051TN	61051A1	61051AT
5-2	61052UC	61052TA	61052TN	61052A1	61052AT
1-0	71010UC	71010TA	71010TN	71010A1	71010AT
1-1	71011UC	71011TA	71011TN	71010A1	71010A1 71011AT
1-2	71011UC	71011TA	71011TN	71011A1	71011AT
2-0	71020UC	71020TA	71020TN	71020A1	71020AT
2-1	71021UC	71020TA	71020TN 71021TN	71020A1	71020AT
2-2	710210C	71021TA	71021TN	71022A1	71021AT
5-0	71050UC	71050TA	71050TN	71050A1	71050AT
5-1	71051UC	71051TA	71051TN	71051A1	71051AT
5-2	71052UC	71052TA	71052TN	71052A1	71052AT
1.0	0101000	0101074	01010TN	0101041	0101047
1-0	91010UC	91010TA	91010TN	91010A1	91010AT
1-1	91011UC 91012UC	91011TA	91011TN	91011A1	91011AT
2-0		91012TA	91012TN	91012A1	91012AT
2-0	91020UC 91021UC	91020TA 91021TA	91020TN 91021TN	91020A1 91021A1	91020AT 91021AT
2-1	91021UC	91021TA 91022TA	91021TN 91022TN	91021A1 91022A1	91021A1 91022AT
5-0	91050UC	91050TA	91022TN 91050TN	91050A1	91022AT
5-1	91051UC	91051TA	91051TN	91051A1	91050AT
5-2	91052UC	91052TA	91052TN	91051A1	91051AT
	3103200	JIUJZIA	31032111	JIUJZAI	JIOJZAI

*Carbide Classification Availability order as 1, 2, or 5



Toughest Grade All applications + Exotics (ULTRA-Carb®)2 Hardest Grade Cast Iron, Stainless Low Carbon Steels

(ULTRA-Carb®) 5 Tough + Hard

Steels, Stainless

Hard materials

SmoothEdge® 0 No Hone, Upsharp = 0 Razor sharp for max shearing

*Edge Prep Availability order as 0, 1, or 2 SmoothEdge® 1

> Light Hone = 1 Added edge strength w/high shear General Purpose for most materials

SmoothEdge® 2

Heavy Hone = 2 Strongest cutting edge Exotics, PH Stainless, Heat treated alloys

Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "52AT" or 5-2-AT).



USING THE MIL-LOC FEATURE FOR ROUND INSERTS: The Mil-Loc keeps Round inserts from spinning under load and ensures 8 indexes. Using the 1/16" hex key included with every cutter, turn the screw from the back side so that the half-dog on the special Mil-Loc screw protrudes about .030". Be sure that the thread of the screw is not above the bottom of the pocket. Place the insert into the pocket so that the matching indents in the back of the insert align with the Mil-Loc screw in the cutter pocket. Tighten the insert normally with the center screw. Be sure to retract the Mil-Loc screw completely when using Octagon or Square inserts.

Plastics, Aluminum, Non-Ferrous

★MILTEC®★ ©



Mil-Tec Freedom Cutter® Inserts: Square

.005

72110

72111

72120

72121

72122

72150

72151

72152

72210

72211

72212

72220

72221

72222

72250

72251

72252

72310

72311

72320

72321

72322

72350

72351

72352

- SmoothGrind® precision grinding
- SmoothCoat® PVD hard coatings
- 4 indexes for value / 9 radius sizes
- Positive Geometry / free cutting
- 4 Different geometries
- Fits all Freedom Cutter pockets
- 5/8" IC with 3/16" thickness
- Same insert works with Fractional and Metric bodies

*Class/ **Edge Prep Square**

1 - 0

1-2

5-0

5-1

5-2

72010

72011

72012

72020

72021

72022

72050

72051

72052



Square (S)

.032

.016

The Mil-Tec Square Freedom Cutter insert features four indexes and is available in four different precision ground geometries. Inserts are sold in packs of ten.

Squares feature a sharp corner or 9 different radii. Available coatings are listed under the Geometry.

Add coating suffix to the listed EDP# (i.e. #52010A1).

.125

Note FC inserts are sold in packs of 10. List prices are for individual inserts. FDP#'s listed below.

FC Insert **List Prices**

.062

UnCoated \$15.50 Coated

.093



.250

72910

72911

72920

72921

72922

72950

72951

72952

.187



High positive grind available in all shapes. Ideal for aluminum, nonferrous, plastic, & non-metals.







	200									
1-0	52010	52110	52210	52310	52410	52510	52610	52710	52810	52910
1-1	52011	52111	52211	52311	52411	52511	52611	52711	52811	52911
1-2	52012	52112	52212	52312	52412	52512	52612	52712	52812	52912
2-0	52020	52120	52220	52320	52420	52520	52620	52720	52820	52920
2-1	52021	52121	52221	52321	52421	52521	52621	52721	52821	52921
2-2	52022	52122	52222	52322	52422	52522	52622	52722	52822	52922
5-0	52050	52150	52250	52350	52450	52550	52650	52750	52850	52950
5-1	52051	52151	52251	52351	52451	52551	52651	52751	52851	52951
5-2	52052	52152	52252	52352	52452	52552	52652	52752	52852	52952

.047



ver Shear

Medium positive grind for steel, stainless, and exotics. The perfect "all-application" geometry.







1-0	62010	62110	62210	62310	62410	62510	62610	62710	62810	62910
1-1	62011	62111	62211	62311	62411	62511	62611	62711	62811	62911
1-2	62012	62112	62212	62312	62412	62512	62612	62712	62812	62912
2-0	62020	62120	62220	62320	62420	62520	62620	62720	62820	62920
2-1	62021	62121	62221	62321	62421	62521	62621	62721	62821	62921
2-2	62022	62122	62222	62322	62422	62522	62622	62722	62822	62922
5-0	62050	62150	62250	62350	62450	62550	62650	62750	62850	62950
5-1	62051	62151	62251	62351	62451	62551	62651	62751	62851	62951
5-2	62052	62152	62252	62352	62452	62552	62652	62752	62852	62952

72410

72411

72420

72421

72422

72450

72451

72452

72510

72511

72520

72521

72522

72550

72551

72552

72610

72611

72620

72621

72622

72650

72651

72652

72710

72711

72720

72721

72722

72750

72751

72752

72810

72811

72820

72821

72822

72850

72851

72852



Negative / Positive Frustroconical Land SmoothGrind®

heavy feed rates. Ideal for steel, stainless. & heat-treated allovs











Flat top grind for all materials.







1-0	92010	92110	92210	92310	92410	92510	92610	92710	92810	92910
1-1	92011	92111	92211	92311	92411	92511	92611	92711	92811	92911
1-2	92012	92112	92212	92312	92412	92512	92612	92712	92812	92912
2-0	92020	92120	92220	92320	92420	92520	92620	92720	92820	92920
2-1	92021	92121	92221	92321	92421	92521	92621	92721	92821	92921
2-2	92022	92122	92222	92322	92422	92522	92622	92722	92822	92922
5-0	92050	92150	92250	92350	92450	92550	92650	92750	92850	92950
5-1	92051	92151	92251	92351	92451	92551	92651	92751	92851	92951
5-2	92052	92152	92252	92352	92452	92552	92652	92752	92852	92952



Molded and ground chip control: ideal for stainless & exotics including titanium and inconel.



80311AT new!

*Edge Prep Availability order as 0, 1, or 2

Use this sole Square AT coated Mag-Na-Shear selection for heavy wear and high heat resistance in stainless, titanium, & high temp alloy apps.

*Carbide Classification Availability order as 1, 2, or 5





Low Carbon Steels



SmoothEdge® 0 No Hone, Upsharp = 0 Razor sharp for max shearing Plastics, Aluminum, Non-Ferrous

SmoothEdge® 1

Light Hone = 1 Added edge strength w/high shear SmoothEdge® 2 Heavy Hone = 2

Strongest cutting edge Exotics, PH Stainless, Heat treated alloys

Steels, Stainless Hard materials

General Purpose for most materials





Mil-Tec Freedom Cutter® Inserts: Square 90°

- SmoothGrind® precision grinding
- SmoothCoat® PVD hard coatings
- 2 indexes for value / 9 radius sizes
- Positive Geometry / free cutting
- 3 Different geometries
- Fits all Freedom Cutter pockets
- 5/8" IC with 3/16" thickness
- Cuts true 90° corner
- Same insert works with Fractional and Metric bodies

*Class/



Square 90 (Z)

The Mil-Tec Square 90° Freedom Cutter insert features two indexes and is available in three different precision ground geometries. Inserts are sold in packs of ten.

Squares feature a sharp corner or 9 different radii. Available coatings are listed under the Geometry.

Add coating suffix to the listed EDP# (i.e. #53010A1).

Note FC inserts are sold in packs of 10. List prices are for individual inserts. EDP#'s listed below

FC Insert **List Prices**

UnCoated \$14.50 \$15.50 Coated

See Figure #2 on Page 19 for 90° loading info





Maximum high positive grind for square inserts with 90° shoulder. "Super Aluminum" geometry.











High positive grind available in all shapes. Ideal for aluminum, nonferrous, plastic, & non-metals.









Medium positive grind for steel, stainless, and exotics. The perfect "all-application" geometry.







			ı
A			r
			H
			L
			Т

E	dge Prep	Square	.005	.016	.032	.047	.062	.093	.125	.187	.250
	1-0	43010	43110	43210	43310	43410	43510	43610	43710	43810	43910
	1-1	43011	43111	43211	43311	43411	43511	43611	43711	43811	43911
	1-2	43012	43112	43212	43312	43412	43512	43612	43712	43812	43912
	2-0	43020	43120	43220	43320	43420	43520	43620	43720	43820	43920
	2-1	43021	43121	43221	43321	43421	43521	43621	43721	43821	43921
	2-2	43022	43122	43222	43322	43422	43522	43622	43722	43822	43922
	5-0	43050	43150	43250	43350	43450	43550	43650	43750	43850	43950
	5-1	43051	43151	43251	43351	43451	43551	43651	43751	43851	43951
	5-2	43052	43152	43252	43352	43452	43552	43652	43752	43852	43952
	1-0	53010	53110	53210	53310	53410	53510	53610	53710	53810	53910
	1-1	53011	53111	53211	53311	53411	53511	53611	53711	53811	53911
	1-2	53012	53112	53212	53312	53412	53512	53612	53712	53812	53912
	2-0	53020	53120	53220	53320	53420	53520	53620	53720	53820	53920
	2-1	53021	53121	53221	53321	53421	53521	53621	53721	53821	53921
	2-2	53022	53122	53222	53322	53422	53522	53622	53722	53822	53922
	5-0	53050	53150	53250	53350	53450	53550	53650	53750	53850	53950
	5-1	53051	53151	53251	53351	53451	53551	53651	53751	53851	53951
	5-2	53052	53152	53252	53352	53452	53552	53652	53752	53852	53952
	1-0	63010	63110	63210	63310	63410	63510	63610	63710	63810	63910
	1-1	63011	63111	63211	63311	63411	63511	63611	63711	63811	63911
	1-2	63012	63112	63212	63312	63412	63512	63612	63712	63812	63912
	2-0	63020	63120	63220	63320	63420	63520	63620	63720	63820	63920
	2-1	63021	63121	63221	63321	63421	63521	63621	63721	63821	63921
	2-2	63022	63122	63222	63322	63422	63522	63622	63722	63822	63922
	5-0	63050	63150	63250	63350	63450	63550	63650	63750	63850	63950
	5-1	63051	63151	63251	63351	63451	63551	63651	63751	63851	63951
	5-2	63052	63152	63252	63352	63452	63552	63652	63752	63852	63952

*Carbide Classification Availability order as 1, 2, or 5



Toughest Grade All applications + Exotics



Hardest Grade Cast Iron, Stainless Low Carbon Steels



Tough + Hard Steels, Stainless Hard materials

*Edge Prep Availability order as 0, 1, or 2

SmoothEdge® 0

No Hone, Upsharp = 0 Razor sharp for max shearing Plastics, Aluminum, Non-Ferrous SmoothEdge® 1

Light Hone = 1 Added edge strength w/high shear General Purpose for most materials SmoothEdge® 2

Heavy Hone = 2 Strongest cutting edge
Exotics, PH Stainless, Heat treated alloys

Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "52AT" or 5-2-AT).



HEARDISBE



OURS Shears material with positive ground geometry Carries heat off with the chipLeaves the workpiece cool to the touch



THEIRS Pushes material with pressed geometryPunishes the workpiecePunishes the entire machine tool assembly

"REPROGRAM YOUR MILLING EXPECTATIONS"

★ MILTEC®★



Mil-Tec Freedom Cutter® Inserts: Wipers

- SmoothGrind® precision grinding
- SmoothCoat® PVD hard coatings
- Improves Visual & Measured finish
- Positive Geometry / free cutting
- Used with standard FC inserts
- Fits all Freedom Cutter pockets
- 5/8" IC with 3/16" thickness
- Same insert works with Fractional and Metric bodies

The Mil-Tec Wiper insert improves visual and measured surface finish on all materials. Inserts are sold in packs of ten. NP style used in conjunction with standard FC inserts by using 1 Wiper as replacement in assembly. SS, SS90, and SA90 Wipers are used as direct replacement for all inserts within the cutter.

• Add coating suffix to the listed EDP# (i.e. #41006A1).

Note FC inserts are sold in packs of 10. List prices are for individual inserts. EDP#'s listed below.

FC Insert List Prices UnCoated \$14.50 Coated \$15.50





Negative / Positive Frustroconical Land SmoothGrind®

Produces lowest RA finishes. Ideal for steel, stainless, heat-treated alloys and more.





*Class/ Rad **Edge Prep** .016 .032 .047 .062 .093 .125 .187 .250 2-0 73020 73120 73220 73320 73420 73520 73720

73051 | 73151 | 73251 | 73351 | 73451 | 73551 | 73651

Square NP with radius to be used with NP, PS, PS90, SS, and SS90 Square Freedom Cutter inserts. One wiper insert is used per cutter body assembly. Match the Wiper radius to the balance of the inserts. Note these inserts have a single index which is laser-etched for easy identification.





Negative / Positive Frustroconical Land SmoothGrind®

Produces lowest RA finishes. Ideal for steel, stainless, heat-treated alloys and more.





*Class/ 45° Edge Prep Lead

> 2-0 73820 5-1 73851

Octagon NP with 45° Lead to be used with NP, PS, and SS Octagon Freedom Cutter inserts. One wiper insert is used per cutter body assembly. Note these inserts have a single index which is laser-etched for easy identification.



NP wipers have a single index and are installed in only one cutter pocket.

SS Aluminum wipers have four indexes

SS90 & SA90 wipers have two indexes and are installed in every cutter pocket.



Super Shear High Dish SmoothGrind®

High positive with integral wiper. Good finishes with general milling. Ideal for aluminum & non-ferrous.





*Class/ Rad Edge Prep .032 .062

Square SS with .032 radius for Aluminum applications. Note these inserts have a Wiper on each index and should be installed in every cutter body pocket.





High positive with integral wiper. Good finishes with general milling. Ideal for aluminum & non-ferrous





*Class/ Rad Edge Prep .032

2-0 41007

Square SS90 with .032 radius for Aluminum applications. Note these inserts have a Wiper on each index and should be installed in every cutter body pocket.






Max positive with integral wiper. Good finishes with general milling. Ideal for aluminum & non-ferrous.





*Class / Rad Edge Prep .032

Square SA90 with .032 radius for Aluminum applications. Note these inserts have a Wiper on each index and should be installed in every cutter body pocket.







Mil-Tec Freedom Cutter® Inserts: Special Apps

- SmoothGrind® precision grinding
- SmoothCoat® D1 and D2 Diamond
- PCD Diamond-tipped
- Silicon Nitride (solid)
- Positive Geometry / free cutting
- Fits all Freedom Cutter pockets
- 5/8" IC with 3/16" thickness
- Same insert works with Fractional and Metric bodies

Mil-Tec Freedom Cutter Special App inserts feature substrates and materials for unique machining environments. PCD & D2 inserts on this page are priced, packaged and sold individually.







Mil-Tec's PCD-tipped inserts offer incredible tool life in materials including graphite, hard carbon, filled-plastics, fiberglass, reinforced & metal matrix composites, silicon aluminum, and more. PCD also offers consistent PCD

machining finishes. GP Flat Top geometry. PCD tip length = $.190 \pm .008$

new 45° PCD insert

Part#	Description	Price USD each	EDP#
S-GP-000-PCD	PCD Square General Purpose	\$98.00	41020
S-GP-005-PCD	PCD Square General Purpose w/.005R	\$98.00	41021
S-GP-016-PCD	PCD Square General Purpose w/ .016R	\$98.00	41022
S-GP-032-PCD	PCD Square General Purpose w/ .032R	\$98.00	41023
S-GP-062-PCD	PCD Square General Purpose w/.062R	\$98.00	41024
S-GP-090-PCD	PCD Square General Purpose w/ .090R	\$98.00	41025
S-GP-125-PCD	PCD Square General Purpose w/ .125R	\$98.00	41026
S-GP-45D-PCD	PCD Square General Purpose w/ 45° angle	\$98.00	41027



Mil-Tec's D2 CVD Diamond coating is thicker and harder than D1. Used for the same application range, D2 will offer substantially longer tool life.

Part#	Description	Price USD each	EDP#
O-GP-062-D2	D2 Diamond Octagon GenPurpose w/ .062R	\$74.00	41004D2
S-GP-032-D2	D2 Diamond Square GenPurpose w/ .032R	\$74.00	41104D2

PCD & D2 inserts sold individually

D1 & SN inserts sold in 10-packs



Mil-Tec's D1 PVD Diamond coated inserts offer a smooth and hard surface for excellent erformance at a value price. Our thinnest diamond, D1 retains an extremely sharp cutting edge and is ideal for abrasive materials such as composites, graphite, fiberglass, filled-plastics, silicon aluminum, and more.

Please note, these inserts are stocked, but ANY Freedom Cutter insert can be D1 coated and shipped typically within 2 weeks.

Part#	Description	Price USD each	EDP#
O-SS-062-2-0-D1	D1 Diamond Octagon Super Shear w/ .062R	\$19.00	50020D1
O-PS-062-2-0-D1	D1 Diamond Octagon Power Shear w/.062R	\$19.00	60020D1
O-NP-062-2-0-D1	D1 Diamond Octagon NP w/.062R	\$19.00	70020D1
O-GP-062-2-0-D1	D1 Diamond Octagon GenPurpose w/ .062R	\$19.00	90020D1
Z-SS-032-2-0-D1	D1 Diamond Square 90° Super Shear	\$19.00	53320D1
Z-PS-032-2-0-D1	D1 Diamond Square 90° Power Shear	\$19.00	63320D1
S-NP-032-2-0-D1	D1 Diamond Square NP	\$19.00	72320D1
S-GP-032-2-0-D1	D1 Diamond Square General Purpose	\$19.00	92320D1
R-SS-312-2-0-D1	D1 Diamond Round Super Shear w/.312R	\$19.00	51020D1
R-PS-312-2-0-D1	D1 Diamond Round Power Shear w/ .312R	\$19.00	61020D1
R-GP-312-2-0-D1	D1 Diamond Round General Purpose w/.312R	\$19.00	91020D1



Mil-Tec's solid Silicon Nitride inserts are ideal for use in Cast Iron and can be used at higher speeds (2500 SFPM) resulting in improved finish and longer insert life.

Part#	Description	Price USD each	EDP#
O-NP-062-S1-UC	Silicon Nitride Octagon NP w/ .062R	\$24.50	41001
S-NP-032-S1-UC	Silicon Nitride Square NP w/.032R	\$24.50	41002



Watch video demonstrations of all our products at the Tool Alliance channel on YouTube.





Mil-Tec Freedom Cutter® Madness & Kits

★MILTEC®★ ©

Mil-Tec offers some of the indexable industry's best sales promotions and, even better, the Madness never ends! Our Madness and Kit programs are available throughout the year and can be applied to our most popular Freedom Cutter body and insert combinations using the following methods:



MILTE MADNESS! MILTE MADNESS! MILTE MADNESS!





Madness: Select any Freedom Cutter Plus+, Plus+45, or High Feed Shell Mill cutter* on page #5 or #6 for \$50 per inch when purchasing ten Freedom Cutter inserts per inch of cutter body.

Example: 3" FC is \$150 + 30 coated FC inserts @ \$15.50 each = \$615 total cost

*Shell Mills only (6" & smaller). Inserts can be mixed in lots of 10 each (case quantities).





Kits: We've taken our most popular sizes and Octagon geometry, included ten inserts, wrenches, extra screws & anti-seize, placed it all in a handy package, and discounted the price.

Mil-Tec's Octagon shape has eight cutting indexes and a .062 radius size.



High positive grind available in all shapes. Ideal for aluminum. non-ferrous, plastic, & non-metals.

Use this Kit for Aluminum

Diameter 2"

3" EDP# 02202A1 02203A1 02204Δ1 Price \$338.00 \$455.00 \$552.00

#50020A1 insert w/FC-2-4, FC-3-5/5NS, or FC-4-6



Medium positive grind for steel, stainless, and exotics. The perfect "all-application" geometry.

Use this Kit for Mild Steel & Stainless 3" Diameter 2"

02205TA | 02206TA | 02207TA \$338.00 \$455.00 \$552.00

#60051TA insert w/FC-2-4, FC-3-5/5NS, or FC-4-6



Molded and ground chip control; ideal for stainless & exotics including titanium and inconel.

Use this Kit for Titanium & Exotic alloys Diameter 2" 3"

EDP# 02211AT 02212AT 02213AT \$338.00 \$455.00 \$552.00

#80012AT insert w/FC-2-4, FC-3-5/5NS, or FC-4-6



Strongest insert and designed for heavy feed rates. Ideal for steel, stainless. & heat-treated allovs.

Use this Kit for Alloy Steel & PH Stainless

3" Diameter 2"

EDP# 02208TA 02209TA 02210TA \$338.00 \$455.00 \$552.00

#70052TA insert w/FC-2-4, FC-3-5/5NS, or FC-4-6



Starter Kit: We've taken a 3" Freedom Cutter face mill combined with a 3/4 and 1" High Velocity indexable end mill, plus a compliment of our most popular inserts (+ screws / wrenches) to create a fantastic Starter Kit. This single kit will allow for a diverse array of machining applications on a wide variety of materials (aluminum, stainless, steels, titanium), all bundled together at a value price!

3" Freedom Cutter Body (#02007 or #02008) w/ 10 total Octagon inserts

- 5 inserts O-SS-062-20UC for aluminum (#50020UC)
- 5 inserts O-PS-062-52TA for steel / stainless (#60052TA)

3/4" HV3HD End Mill cutter body (#20005) w/ 4 total inserts

- 2 inserts HV3HD-032S-20UC for aluminum (#30020UC)
- 2 inserts HV3HD-032P-11AT for steels / exotics (#30024AT

1" HV5HD End Mill cutter body (#10000) w/6 total inserts

- 2 inserts HV5HD-032S-20UC for aluminum (#40070UC)
- 2 inserts HV5HD-032P-51AT for steels / exotics (#40023AT)
- 2 inserts HV5HD-032P-11AT for titanium / exotics (#40024AT)

Plus screws, wrenches, and anti-seize



Pick a Starter Kit by FC Bore Diameter FC Bore Diameter

		, -
EDP#	02200	02201
Price	\$625.00	\$625.00



★MILTEC®★ ◎

Mil-Tec Freedom Cutter® Facts, Tips & Hints

GRADE: Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "52AT" or 5-2-AT).

EFFECTIVE CUTTER DIAMETERS: The cutting diameter of your Freedom Cutter will change relative to the cutter body depending upon the shape of the insert selected (see Figure 1). When using Square inserts, the cutting diameter (measured to the outside edge of the insert) will equal the body diameter. When using Octagon inserts, the cutting diameter is reduced approximately 3/8" from the body diameter. When using Round inserts, cutting diameter is reduced approximately 5/8" below the body diameter. Within the Freedom Cutter family, note the Plus+45 alone measures to centerline of insert (see graphic below; the Heavy Duty Series shares this characteristic).

THINGS TO REMEMBER: • Always run Stainless dry (coolant may be used only on very light finishing cuts of .005 - .015)

- SFPM & chip load recommendations are based on 2/3's width of cutter and climb milling
- Recommended depth of cut (DOC) ranges from .025 to .150
- For finishing cuts leave feed rate unchanged but increase RPM by 10% to 30%, with DOC at .015 to .030
- Recommended Speeds & Feeds are starting parameters and may require adjustment dependent upon material & machine condition

LOADING OF 90° INSERTS: When using any 90° insert, ensure that each insert is placed into the pocket with the straight, 90° edge on the periphery of the cutter body (concave edge is down, see Figure 2).

USING THE MIL-LOC FEATURE FOR ROUND INSERTS: The Mil-Loc keeps Round inserts from spinning under load and ensures 8 indexes. Using the 1/16" hex key included with every cutter, turn the screw from the back side so that the half-dog on the special Mil-Loc screw protrudes about .030". Be sure that the thread of the screw is not above the bottom of the pocket. Place the insert into the pocket so that the matching indents in the back of the insert align with the Mil-Loc screw in the cutter pocket. Tighten the insert normally with the center screw. Be sure to retract the Mil-Loc screw completely when using Octagon or Square inserts (see Figure 3).


Commonly Used Formulas:


Surface Feet Minute (SFM)=RPM x Diam. x .262 Revolutions Per Minute (RPM)=3.82 x (SFM / Diam.) Feed Rate (IPM)=IPT x #teeth x RPM Feed Per Tooth (IPT)=IPM / (#teeth x RPM) Convert Inches to millimeters: Multiply by 25.4 Convert millimeters to Inches: Multiply by .03937

*Freedom Cutter Effective Cutter Diameter is to the outside edge of insert (see text above for effect of different insert shapes) except for Plus+45, which is measured to centerline:

See our Metric sizes on pages #31 to #33! All metric sizes utilize our standard Freedom Cutter inserts.




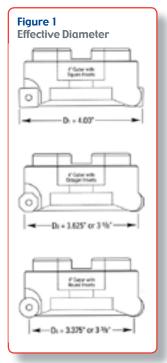

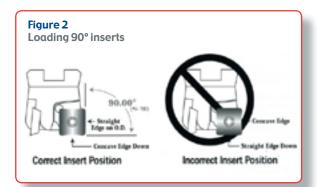



Home of the Freedom Cutter®

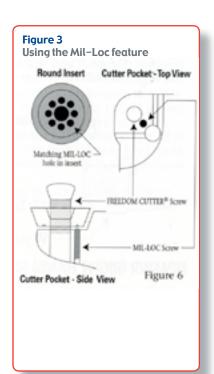



★ MILTEC®★



miltecusa.com





Mil-Tec Freedom Cutter® Speeds and Feeds Speeds and Feeds or the most common material groups plus typical insert selection.

Recommendations based on cut using 2/3rds body width and .150 or less axial depth. Speed in Surface Feet Per Minute (SFPM). Feed in inches per tooth.

*Grade references the last 4 characters of the complete 10 symbol insert name.

**Feed Rate for Square is low to mid-range; Octagon & Round mid to high-range.









1st Choice Class / Prep




items also rea	ture a 95 % + Stock avait				Coating				
Material	Alloy Grade	Mil-Tec Geometry	Octagon 1 st Choice	Square 1 st Choice	Round 1 st Choice	Mil-Tec Grade* (last 4 characters)	Coolant	Speed SFPM	Feed Rate**
Non-Ferrous	6061,7075	Super Shear SS	#50020UC	#52320UC	#51020A1	20UC or 20A1	WorD	1000 - 5000	.003018
	Copper, Brass	Super Shear SS	#50020UC	#52320UC	#51020UC	20UC or 20A1	Wet	800 - 2000	.003010
	Plastics	Super Shear SS	#50020UC	#52320UC	#51020UC	20UC or 20A1	WorD	500 - 3000+	.003018
Steels	1018, 1020	Power Shear PS	#60051TA	#62351TA	#61051TA	51TA or 52TA	Dry	800 - 1200	.003010
	4140, 4340, P20	Power Shear PS	#60051TA	#62352TA	#61051TA	51TA or 52TA	Dry	600 - 1200	.002008
	A2, D2, H13	Power Shear PS	#60052TA	#62352TA	#61052TA	52TA	Dry	400 - 1200	.002006
Steels	1018, 1020	Neg / Positive NP	#70051TA	#72351TA	#71051TA	51TA or 52TA	Dry	800 - 1200	.006018
	4140, 4340, P20	Neg / Positive NP	#70051TA	#72351TA	#71051TA	51TA or 52TA	Dry	600 - 1200	.006012
	A2, D2, H13	Neg / Positive NP	#70052TA	#72352TA	#71052TA	52TA	Dry	400 - 1200	.006012
Stainless	13-8, 15-5, 17-4	Power Shear PS	#60052TA	#62352TA	#61052TA	52TA or 22TA	Dry	500 - 1200	.002010
	303, 304, 316	Power Shear PS	#60051TA	#62351TA	#61051TA	51TA or 21TA	Dry	800 - 1300	.002015
	420, 440C	Power Shear PS	#60052TA	#62352TA	#61052TA	51TA or 52TA	Dry	800 - 1200	.002012
Stainless	13-8, 15-5, 17-4	Neg / Positive NP	#70052TA	#72352TA	#71052TA	52TA or 22TA	Dry	500 - 1200	.006012
	303, 304, 316	Neg / Positive NP	#70051TA	#72351TA	#71051TA	51TA or 21TA	Dry	800 - 1300	.006020
	420, 440C	Neg / Positive NP	#70052TA	#72352TA	#71052TA	51TA or 52TA	Dry	800 - 1200	.006014
High Temp	Inconel	Power Shear PS	#60012TA	#62312TA	#61012TA	12TA or 52TA	Wet	50 - 180	.002006
	Titanium	Power Shear PS	#60012TA	#62312TA	#61012TA	12TA or 52TA	Wet	70 - 300	.002006
High Temp	Inconel	Mag Na Shear MS	#80012TA	#80311AT	n/a	12TA or 52TA	Wet	50 - 250	.002004
	Titanium	Mag Na Shear MS	#80012TA	#80311AT	n/a	12TA or 52TA	Wet	70 - 300	.002004
Cast Iron	Gray Iron	Power Shear PS	#60022TA	#62322TA	#61022TA	22TA or 52TA	Dry	500 - 1200	.004010
	Ductile Iron	Power Shear PS	#60022TA	#62322TA	#61022TA	22TA or 52TA	Dry	600 - 1200	.004010
Cast Iron	Gray Iron	Neg / Positive NP	#70022TA	#72322TA	#71022TA	22TA or 52TA	Dry	500 - 1200	.006014
	Ductile Iron	Neg / Positive NP	#70022TA	#72322TA	#71022TA	22TA or 52TA	Dry	600 - 1200	.006014

FC Series Specifications: Body Diameter ±.005, TIR with installed insert ±.001

Material	Operating Tips
Non-Ferrous	Our 20UC grade is ideal in aluminum and plastics. The polished surface provides a smooth cutting face with a low coefficient of friction. This grade also features an extremely sharp cutting edge for free cutting in soft or gummy materials. The 20A1 grade includes A1 coating. A1 adds additional lubricity and dramatically reduces chip welding. 20A1 is ideal in low coolant or dry machining applications.
Steels	We feature 2 primary grades for steel alloys, 51TA and 52TA. Both use a wear resistant carbide substrate that has been designed for performance in high heat applications. SmoothCoat TA provides further wear resistance, thermal protection, and lubricity. Our TA (a hybrid version of TiAlN) is well suited for dry machining of steel alloys. The difference between the 51TA and 52TA is the edge preparation; 52TA's heavier hone adds strength in the toughest alloys and heat treated steels, and is effective in reducing edge chipping in applications where vibration is a concern.
Stainless Steel	Variations of stainless steel are immense. 15–5 PH and 440C can be heat treated and have increased hardness. Others such as 304 and 316 will work harden and are gummy to machine. The challenge is to find the optimal combination of hardness and wear resistance that is balanced with toughness to prevent excessive chipping. We offer several grades that feature our SmoothEdge hone and TA coating to obtain the perfect balance.
High Temp	Titanium, Inconel, and other chromium / nickel alloys can be a challenge to machine. They were developed specifically for airframe applications where strength and toughness are primary goals. Insert toughness and wear characteristics are critical due to the slower speeds these materials are machined at. Our 12TA provides an excellent balance of both. For finishing applications, our 52TA can be highly effective due to outstanding wear abilities.
Cast Iron	Materials featuring short chips like cast iron require high cutting edge toughness. Casted materials can feature voids and inclusions that are destructive to cutting tools. Our 22TA and 52TA grades are designed to withstand these attributes. 22TA, the first choice, exhibits great toughness while 52TA has better wear resistance.







miltecusa.com

Heavy Duty, High-Velocity. The new HV3HD is the perfect mix of performance and versatility. The 100% ground and polished insert features both positive axial and radial rake, allowing the HV3HD to literally shear through the toughest materials and allowing the chip to carry away a high percentage of the generated heat. If you've been an APKT user, get ready to step up to the high-performance plate. Let's get started!



- Cuts more like solid carbide than **APKT style end mills**
- Perfect for all material groups
- Positive Geometry / Free Cutting
- Cuts a 90° shoulder
- PS and SS Geometry
- SmoothGrind® surface polish
- SmoothCoat® PVD hard coatings
- Compatible with our metric radii inserts new!
- From 5/8" to 11/4" diameter range







Select an HV3HD Cutter Body

All HV3HD Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Metric, Left-Hand, Extended Length, Coolant-Thru, Slotters, or other cutter bodies with lead times as quick as one week. Shank diameter is -.0002 / -.0005

Cutter Diameter	Max LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV3HD Body Part Number	EDP Number	Body List Price USD
5/8	.360	1-1/2	3-3/4	3/4	2	HV3HD-5-2-6	20000	\$104.50
5/8	.360	2-3/4	5"	3/4	2	HV3HD-5-2-6L	20001	\$121.00
3/4	.360	1-1/2	3-3/4	3/4	2	HV3HD-6-2-6	20005	\$104.50
3/4	.360	3.8	6"	3/4	2	HV3HD-6-2-6L	20006	\$121.00
1"	.360	1.8	4"	3/4	3	HV3HD-8-3-6	20015	\$121.00
1"	.360	1.8	4"	1"	3	HV3HD-8-3-8	20020	\$121.00
1"	.360	3.8	6"	1"	3	HV3HD-8-3-8L	20021	\$137.50
1"	.360	4.8	7"	1"	3	HV3HD-8-3-8XL	20022	\$165.00
1-1/4	.360	1.8	4"	3/4	4	HV3HD-10-4-6	20025	\$165.00
1-1/4	.360	1.8	4"	1"	4	HV3HD-10-4-8	20030	\$165.00
1-1/4	.360	3.8	6"	1"	4	HV3HD-10-4-8L	20031	\$181.50
1-1/4	.360	1.8	4"	1-1/4	4	HV3HD-10-4-10	20035	\$165.00
1-1/4	.360	3.8	6"	1-1/4	4	HV3HD-10-4-10L	20036	\$181.50

Select an HV3HD Insert

All HV3HD inserts are parallelogram-shaped and measure 1/4" wide by .360" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear or Power Shear geometry. All inserts have 2 indexes. Length varies by radius.



High positive grind ideal for aluminum. non-ferrous, plastic, & non-metals.







	Rad			
Grade	.005	.016	.032	.062
20UC	30000UC	30010UC	30020UC	30030UC
20A1	30000A1	30010A1	30020A1	30030A1
20D1	3000001	30010D1	30020D1	30030D1

About our Geometry

Mil-Tec's Power Shear has higher edge strength than the Super Shear. The Power Shear is engineered for use in steels, stainless, titanium & inconel, while the Super Shear is ideal for aluminum and other non-ferrous material groups. Both geometries are 100% precision around and feature Tool Alliance's proprietary

1/4" 360 SmoothGrind® technology for superior cutting edge properties

List prices are for individual inserts.

moothGrind® applications

UnCoated Coated

Medium positive grind for

higher-hardness range

steels, stainless, and other

Note HV3HD inserts are sold in packs of 10.





	Kuu			
Grade	.005	.016	.032	.062
51TA	30003TA	30013TA	30023TA	30033TA
11AT	30004AT	30014AT	30024AT	30034AT
21TA	30006TA	30016TA	30026TA	30036TA

SHEARDISBELIEF



HV3HD Insert List Prices

Medium Dish

OURSShears material with positive ground geometry Carries heat off with the chipLeaves the workpiece cool to the touch



THEIRS Pushes material with pressed geometryPunishes the workpiecePunishes the entire machine tool assembly

"REPROGRAM YOUR MILLING EXPECTATIONS"

Carbide Classification designated as 1, 2, or 5

and increased chip lubricity.







Edge Prep designated as 0, 1, or 2



Razor sharp for max shearing Plastics, Aluminum, Non-Ferrous

SmoothEdge®

Light Hone = 1 Added edge strength w/high shear General Purpose for most materials

SmoothEdge® 2

Heavy Hone = 2 Strongest cutting edge Exotics, PH Stainless, Heat treated alloys

*Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "52AT" or 5-2-AT).

★ MILTEC® ★





The Mil-Tec HV5HD High-Velocity End Mill Series

- Positive Geometry / Free Cutting
- Cuts a 90° shoulder
- PS, SS, & Wiper Geometry
- SmoothGrind® surface polish
- SmoothCoat® PVD hard coatings
- From 5/8" to 4" diameter range



New Sizes!

 Cuts more like solid carbide than ADKT style
 Heavy Duty, High-Velocity. The new HV5HD is the perfect mix of performance and versatility. The 100% ground and polished insert features both positive axial and radial rake, allowing the HV5HD to literally shear through the toughest materials and allowing the chip to carry away a high percentage of the generated heat. If you've been an ADKT user, get ready to step up to the high-performance plate. Let's get started!

Select an HV5HD Cutter Body

All HV5HD Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Metric, Left-Hand, Extended Length, Coolant-Thru, Slotters and more with lead times as quick as one week. Shank diameter is -.0002 / -.0005

	Cutter Diameter	Max LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV5HD Shank Body Part Number	EDP Number	Body List Price USD
HV5HD	5/8	.600	1.8	4"	3/4	1	HV5HD-5-1-6	10066	\$90.00
*	5/8	.600	3.8	6"	3/4	1	HV5HD-5-1-6L	10067	\$110.00
	3/4	.600	1.8	4"	3/4	1	HV5HD-6-1-6	10060	\$99.00
CALL DE LA COLUMNIA D	3/4	.600	3.8	6"	3/4	1	HV5HD-6-1-6L	10065	\$121.00
9	1"	.600	1.8	4"	3/4	2	HV5HD-8-2-6	10000	\$110.00
	1"	.600	3.8	6"	3/4	2	HV5HD-8-2-6L	10005	\$126.50
N 700	1"	.600	1.8	4"	1"	2	HV5HD-8-2-8	10010	\$110.00
	1"	.600	2.8	5"	1"	2	HV5HD-8-2-8-5	10012	\$165.00
	1"	.600	3.8	6"	1"	2	HV5HD-8-2-8L	10015	\$126.50
2	1"	.600	4.8	7"	1"	2	HV5HD-8-2-8-7	10017	\$187.00
	1-1/4	.600	1.8	4"	3/4	3	HV5HD-10-3-6	10020	\$154.00
	1-1/4	.600	3.8	6"	3/4	3	HV5HD-10-3-6L	10025	\$170.50
	1-1/4	.600	1.8	4"	1"	3	HV5HD-10-3-8	10030	\$154.00
_	1-1/4	.600	3.8	6"	1"	3	HV5HD-10-3-8L	10035	\$170.50
	1-1/4	.600	4.8	7"	1"	3	HV5HD-10-3-8-7	10037	\$214.50
	1-1/4	.600	1.8	4"	1-1/4	3	HV5HD-10-3-10	10040	\$154.00
	1-1/4	.600	3.8	6"	1-1/4	3	HV5HD-10-3-10L	10045	\$170.50
	1-1/4	.600	4.8	7"	1-1/4	3	HV5HD-10-3-10-7	10047	\$214.50
Shank Style	1-1/2	.600	1.8	4"	1-1/4	4	HV5HD-12-4-10	10050	\$192.50
Otylo	1-1/2	.600	3.8	6"	1-1/4	4	HV5HD-12-4-10L	10055	\$209.00
	1-1/2	.600	4.8	7"	1-1/4	4	HV5HD-12-4-10-7	10057	\$269.50
T	Cutter Diameter	Max LOC	Height	Keyway	Bore	Insert Pockets	HV5HD Shell Body Part Number	EDP Number	Body List Price USD
	2"	.600	1.850	5/16	3/4	5	HV5HD-2-5	10061	\$275.00
7	3"	.600	1-7/8	.380	1"	7	HV5HD-3-7NS	10062	\$385.00
Shell	3"	.600	1-7/8	1/2	1-1/4	7	HV5HD-3-7	10063	\$385.00
Style	4"	.600	1-7/8	.380	1"	7	HV5HD-4-7	10068	\$450.00
	4"	.600	1-7/8	1/2	1-1/4	7	HV5HD-4-7-NS-1.25	10069	\$450.00

Select an HV5HD Insert Featuring new Wiper geometry!

All HV5HD inserts are parallelogram-shaped and measure 3/8" wide by .600" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear or Power Shear geometry. All inserts have 2 indexes. Length varies by radius.



High positive grind ideal for aluminum, non-ferrous, plastic, oothGrind® & non-metals.









Grade	.005	.016	.032	.062	.125
20UC	40050UC	40060UC	40070UC	40080UC	40090UC
20A1	40050A1	40060A1	40070A1	40080A1	40090A1
20D1	40050D1	40060D1	40070D1	40080D1	40090D1

40061UC 40071UC 40081UC 40091UC



Note HV5HD inserts are sold in packs of 10. List prices are for individual inserts. EDP#'s listed below.

HV5HD Insert UnCoated \$14.50 Coated





Medium positive arind for steels, stainless, and other higher-hardness range applications.



Price USD each EDP#



		Nuu				
G	rade	.005	.016	.032	.062	.125
5	51TA	40003TA	40013TA	40023TA	40033TA	40043TA
1	1AT	40004AT	40014AT	40024AT	40034AT	40044AT
2	21TA	40006TA	40016TA	40026TA	40036TA	40046TA
51	TA-W	Wiper	40018TA	40028TA	40038TA	40048TA



Mil-Tec's PCD-tipped inserts offer incredible tool life in materials including graphite, hard carbon, filled-plastics, fiberglass, reinforced & metal matrix composites, silicon aluminum, and more. PCD also offers consistent machining finishes. Sold individually

HV5HD-000-PCD	PCD HV5HD Square End	\$98.00	71020
HV5HD-005-PCD	PCD HV5HD w/.005R	\$98.00	71021
HV5HD-016-PCD	PCD HV5HD w/.016R	\$98.00	71022
HV5HD-032-PCD	PCD HV5HD w/ .032R	\$98.00	71023
HV5HD-062-PCD	PCD HV5HD w/.062R	\$98.00	71024
HV5HD-125-PCD	PCD HV5HD w/.125R	\$98.00	71025

Single index PCD insert length = $.175 \pm .005$

The Mil-Tec HV5R End Mill for Ramping in Aluminum



- Designed for Ramping (up to 20°), plus Helical Interpolation
- Also general milling in Aluminum
- Positive Geometry / Free Cutting
- Cuts a 90° shoulder
- Special Super Shear Geometry
- SmoothGrind® surface polish
- SmoothCoat® PVD hard coatings
- 2 diameters with 5 overall lengths



The new HV5R is an application specific design for High Velocity, aggressive ramping and 3D contour milling of aluminum. The 100% ground and polished Super Shear insert features both positive axial and radial rake, plus an open end tooth geometry for chip evacuation, allowing the HV5R to excel in deep reach and pocketing apps. Let's aet started!







Select an HV5R Cutter Body

All HV5R Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Metric, Left-Hand, Extended Length, Coolant-Thru, Slotters and more with lead times as quick as one week. Shank diameter is -.0002 / -.0005 *max LOC measured with .032 rad

Cutter Diameter	Max LOC*	LOR	OAL	Shank Diameter	Insert Pockets	HV5R Shank Body Part Number	EDP Number	Body List Price USD
1"	.445	1.8	4"	1"	2	HV5R-8-2-8-4	10300	\$137.50
1"	.445	2.8	5"	1"	2	HV5R-8-2-8-5	10301	\$159.50
1"	.445	3.8	6"	1"	2	HV5R-8-2-8-6	10302	\$192.50
1"	.445	4.8	7"	1"	2	HV5R-8-2-8-7	10303	\$220.00
1"	.445	5.8	8"	1"	2	HV5R-8-2-8-8	10304	\$247.50
1-1/4	.445	1.8	4"	1-1/4"	3	HV5R-10-3-10-4	10305	\$192.50
1-1/4	.445	2.8	5"	1-1/4"	3	HV5R-10-3-10-5	10306	\$214.50
1-1/4	.445	3.8	6"	1-1/4"	3	HV5R-10-3-10-6	10307	\$247.50
1-1/4	.445	4.8	7"	1-1/4"	3	HV5R-10-3-10-7	10308	\$275.00
1-1/4	.445	5.8	8"	1-1/4"	3	HV5R-10-3-10-8	10309	\$286.00

Select an HV5R Insert

All HV5R inserts are parallelogram-shaped and measure 3/8" wide by .445" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear geometry. All inserts have 2 indexes. Length varies by radius.



High positive grind ideal for aluminum, non-ferrous, plastic,









Grade





Note HV5R inserts are sold in packs of 10.



20UC 41020UC 41030UC 41040UC 41050UC 41020A1 41030A1 41040A1 41050A1 20A1 41020TC 41030TC 41040TC 41050TC



- Scan this QR Code for our 10° Ramp Angle video
 - 2,500 SFPM @ .003 CPT ramping
 - 2.500 SFPM @ .006 CPT straight milling
 - .150" axial DOC / total depth 1.020"



- Scan this QR Code for our 5° Helical Interpolation video
- 2,500 SFPM @ .003 CPT interpolation
- hole diameter 1.872"
- total axia depth 1.100"





★ MILTEC®★ ©

new!

The Mil-Tec HD5.1HF High Feed End Mill Series

- HV5 Performance in a new **High Feed design**
- Cuts more like solid carbide than molded style inserts
- Perfect for all material groups
- Positive Geometry / Free Cutting
- GP and PS Geometry
- SmoothGrind® surface polish
- SmoothCoat® PVD hard coatings

Heavy Duty, High Feed. The new HD5.1HF is the perfect mix of power and versatility. The 100% ground and polished insert features both positive axial and radial rake, allowing the HD5.1HF to literally shear through the toughest materials and allowing the chip to carry away a high percentage of the generated heat. Both the cutter body and inserts have been re-engineered and optimized for High Feed milling. If you've been a standard ISO insert user, get ready to step up to the High Feed plate. Let's get started!



- Up to .050" Axial Depth of Cut
- Chip Loads up to .040"
- Ideal for 40-Taper CNC's
- Shoulder / Ramp milling
- High Feed capabilities in Steels and: Stainless (up to 400 IPM) Titanium **High Temp alloys Cast Iron**
- See Tech Info on Page #29

HV5HD Shank Body

SHEARDISBELIEF



OURSShears material with positive ground geometry Carries heat off with the chipLeaves the workpiece cool to the touch



HD5.1HF Insert

ower Shear

Medium Dish SmoothGrind[©]

List Prices

Grade

51UC

51AT

51A2

THEIRS Pushes material with pressed geometryPunishes the workpiecePunishes the entire machine tool assembly

"REPROGRAM YOUR MILLING EXPECTATIONS"

Select an HD5.1HF Cutter Body

Insert

All HD5.1HF Cutter Bodies are machined in our own modern CNC factory in Fort Myers. FL from special pre-hardened steel to exacting tolerances. The geometry is optimized for a High Feed design (use HD5.1HF inserts only). Shank diameter is -.0002 / -.0005

Shank

HD5.1HF	
**	

	Diameter	Length	LOR	OAL	Diameter	Pockets	Part Number	Number	Price USD
	1"	.600	1.8	4"	1"	2	HD5.1HF-8-2-8	10110	\$137.50
	1"	.600	3.8	6"	1"	2	HD5.1HF-8-2-8L	10111	\$159.50
١	1-1/4	.600	1.8	4"	1"	3	HD5.1HF-10-3-8	10112	\$192.50
	1-1/4	.600	3.8	6"	1"	3	HD5.1HF-10-3-8L	10113	\$214.50
	1-1/4	.600	1.8	4"	1-1/4	3	HD5.1HF-10-3-10	10114	\$192.50
	1-1/4	.600	3.8	6"	1-1/4	3	HD5.1HF-10-3-10L	10115	\$214.50
	1-1/2	.600	1.8	4"	1-1/4	4	HD5.1HF-12-4-10	10116	\$247.50
	1-1/2	.600	3.8	6"	1-1/4	4	HD5.1HF-12-4-10L	10117	\$264.00

Insert

Select an HD5.1HF Insert

Cutter

All HD5.1HF inserts are parallelogram-shaped and measure 3/8" wide by .600" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique General Purpose or Power Shear geometry. All inserts have 2 indexes.



General Purpose lat Top moothGrind®

Robust, flat top grind for all













Rad

.032

40015UC

40015AT

40015A2

Note HD5.1HF inserts are sold in packs of 10 List prices are for individual inserts

EDP

Body List

EDP#'s listed below. UnCoated \$13.50 Coated \$14.50 \$15.50 A2 Coated

> Medium positive grind for steels, stainless, and other higher-hardness range applications.







About our Geometry

Mil-Tec's Power Shear has higher edge strength than our Super Shear. The Power Shear is engineered for use in steels, stainless, titanium & inconel, and coupled with the special pocket design of the HD5.1 cutter is the ideal solution for high feed milling. All

geometries are 100% precision ground and feature Tool Alliance's proprietary SmoothGrind® technology for superior cutting edge properties and increased chip lubricity.

AT Coating

Mil-Tec's AT coating is perfect for the high feed roughing of the hard and abrasive materials the HD5.1HF is designed for and is highly recommended. Our A2 doubles the thickness for increased wear in demanding applications. UC (UnCoated) is displayed for use in apps requiring other special solutions.

The Mil-Tec HV10 High-Velocity End Mill Series

- Perfect for Aluminum,
 Non-Ferrous Alloys & more
- Positive Geometry / Free Cutting
- Up to .950 cutting length
- Super Shear & Power Shear Geometry
- SmoothGrind® surface polish
- SmoothCoat® A1 TiB2 hard coating for dry machining
- From 1" to 6" diameter range
- Available in both Shank and Shell Mill style bodies
- New Extended Reach Styles!



The new HV10 is the perfect choice for High Velocity, high performance milling in aluminum, non-ferrous alloys, and more. The 100% ground and polished insert features both positive axial and radial rake, allowing the HV10 to literally shear through the work piece material. The long insert length is ideal for deep axial cuts, and also generates a 90° shoulder. A two screw design lends superior holding strength between insert and body. The razor sharp cutting edge generates smooth, clean cuts resulting in excellent part finishes.







Select an HV10 Cutter Body (Shank & Shell Mill Styles)

All HV10 Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Metric, Left-Hand, Extended Length, Coolant-Thru, Integral Shank, or other cutter bodies with lead times as quick as one week. Shank diameter is -.0002 / -.0005

	Cutter Diameter	Max LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV10 Shank Body Part Number	EDP Number	Body List Price USD
Sec. News	1"		LON		Diameter	Pockers			
O made		.950	_	4-1/2	1	!	HV10-1-1-8	10070	\$121.00
	1"	.950	4-1/2	7"	1"	1	HV10-1-1-8L	10171	\$159.50
	1-1/4	.950	2"	4-1/2	3/4	2	HV10-1.25-2-6	10071	\$165.00
	1-1/4	.950	2"	4-1/2	1"	2	HV10-1.25-2-8	10072	\$165.00
	1-1/4	.950	4-1/2	7"	1"	2	HV10-1.25-2-8L	10172	\$231.00
100	1-1/4	.950	2"	4-1/2	1-1/4	2	HV10-1.25-2-10	10073	\$165.00
	1-1/4	.950	3-1/2	6"	1-1/4	2	HV10-1.25-2-10E	10077	\$231.00
-	1-1/4	.950	4-1/2	7"	1-1/4	2	HV10-1.25-2-10L	10174	\$231.00
_	1-1/2	.950	2"	4-1/2	1"	3	HV10-1.5-3-8	10074	\$198.00
-	1-1/2	.950	2"	4-1/2	1-1/4	3	HV10-1.5-3-10	10075	\$198.00
_	1-1/2	.950	3-1/2	6"	1-1/4	3	HV10-1.5-3-10E	10175	\$258.50
	1-1/2	.950	4-1/2	7"	1-1/4	3	HV10-1.5-3-10L	10176	\$258.50
Shank	2"	.950	2"	4-1/2	1-1/4	3	HV10-2-3-10	10076	\$269.50
Style	2"	.950	4-1/2	7"	1-1/4	3	HV10-2-3-10L	10177	\$352.00
	Cutter Diameter	Max LOC	Height	Keyway	Bore	Insert Pockets	HV10 Shell Body Part Number	EDP Number	Body List Price USD
None of	2"	.950	2.15	5/16	3/4	2	HV10-2-2	10080	\$222.50
	2"			5/16			-		
		.950	2.15		3/4	3	HV10-2-3	10081	\$236.50
1	3"	.950	2.15	3/8		3	HV10-3-3	10082	\$330.00
	3"	.950	2.15	3/8	1"	5	HV10-3-5	10083	\$379.50
	4"	.950	2.185	5/8	1-1/2	5	HV10-4-5	10084	\$495.00
Shell	5"	.950	2.185	5/8	1-1/2	6	HV10-5-6	10085	\$616.00
Style	6"	.950	2.185	5/8	1-1/2	7	HV10-6-7	10086	\$682.00

Select an HV10 Insert

All HV10 inserts are parallelogram-shaped and measure 7/16" wide by .950 in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear or Power Shear geometry. All inserts have 2 indexes. Length varies by radius.



SS Super Shear High Dish SmoothGrind

High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.







 Grade
 .005
 .032
 .062
 .090
 .125
 .187
 .250*

 20UC
 42031UC
 42050UC
 42070UC
 42080UC
 42082UC
 42095UC


 20A1
 42031A1
 42050A1
 42060A1
 42070A1
 42080A1
 42082A1
 42095A1

 20D1
 42031D1
 42050D1
 42070D1
 42080D1
 42082D1
 42095D1

Ш

About our Geometry

Mil-Tec's Super Shear is ideal for aluminum and other non-ferrous material groups. The geometry is 100% precision ground and feature Tool Alliance's proprietary SmoothGrind® technology for superior cutting edge properties and increased chip lubricity. Power Shear adds toughness for more difficult jobs. Each has been matched with the appropriate Grade, Edge Prep, and Coating for optimum application specific milling results.



Note HV10 inserts are sold in packs of 5. List prices are for individual inserts.

EDP#'s listed below.

UnCoated \$25.00 Coated \$28.00





HV10 Insert List Prices

Medium positive grind for steels, stainless, and other medium hardness range applications.





 Grade
 .032
 .062
 .090
 .125
 .187
 .250*

 21TA
 42000TA
 42010TA
 42020TA
 42030TA
 42032TA
 42045TA

 21A1
 42000A1
 42010A1
 42020A1
 42030A1
 42032A1
 42045A1

*Please note the .250 radius requires a slight modification to cutter pocket for clearance.





Our A1 (TiB2) coating allows for dry machining of many aluminum and non-ferrous applications. Enjoy the cost and environmental benefits of dry machining today!



HV10 Shell Mill Style

★ MILTEC® ★

The Mil-Tec HV11 High-Velocity End Mill Series

- Perfect for Aluminum, Non-Ferrous Alloys & more
- Positive Geometry / Free Cutting
- Up to 1.5" cutting length
- Super Shear Geometry creates super sharp cutting edge
- SmoothGrind® surface polish
- SmoothCoat® A1 TiB2 hard coating for dry machining and D1 PVD Diamond for abrasive materials
- From 11/4" to 2" diameter range
- New Extended Reach Styles!



The new HV11 is the perfect choice for High Velocity, high performance milling in aluminum, non-ferrous alloys, and more. The 100% ground and polished insert features both positive axial and radial rake, allowing the HV11 to literally shear through the work piece material. The long insert length is ideal for deep axial cuts, and also generates a 90° shoulder. A two screw design lends superior holding strength between insert and body. The razor sharp cutting edge generates smooth, clean cuts resulting in excellent part finishes.





Select an HV11 Cutter Body (Shank Mill Styles)

All HV11 Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Metric, Left-Hand, Extended Length, Coolant-Thru, Integral Shank, or other cutter bodies with lead times as quick as one week. Shank diameter is -.0002 / -.0005

Cutter Diameter	Max LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV11 Shank Body Part Number	EDP Number	Body List Price USD
1-1/4	1-1/2	2"	5"	1"	2	HV11-1.25-2-8	10200	\$264.00
1-1/4	1-1/2	2"	5"	1-1/4	2	HV11-1.25-2-10	10201	\$264.00
1-1/4	1-1/2	3-1/2	6-1/2	1-1/4	2	HV11-1.25-2-10E	10202	\$341.00
1-1/4	1-1/2	4-1/2	8"	1-1/4	2	HV11-1.25-2-10L	10203	\$341.00
1-1/2	1-1/2	2"	5"	1"	3	HV11-1.5-3-8	10204	\$308.00
1-1/2	1-1/2	2"	5"	1-1/4	3	HV11-1.5-3-10	10205	\$308.00
1-1/2	1-1/2	3-1/2	6-1/2	1-1/4	3	HV11-1.5-3-10E	10206	\$368.50
1-1/2	1-1/2	4-1/2	8"	1-1/4	3	HV11-1.5-3-10L	10207	\$368.50
2"	1-1/2	2"	5"	1-1/4	3	HV11-2-3-10	10208	\$379.50
2"	1-1/2	3-1/2	6-1/2	1-1/4	3	HV11-2-3-10E	10209	\$462.00
2"	1-1/2	4-1/2	8"	1-1/4	3	HV11-2-3-10L	10210	\$462.00

Select an HV11 Insert

All HV11 inserts are parallelogram-shaped and measure 7/16" wide by 1.5" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear geometry. All inserts have 2 indexes. Length varies by radius.




High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.

20UC: UnCoated & no edge prep; Aluminum, non-ferrous, non-metals 20A1: A1 (TiB2) coated for superior lubricity and reduced chip weld 20D1: D1 Diamond coated for wear resistance in abrasive materials

About our Geometry

Mil-Tec's Super Shear is ideal for aluminum and other non-ferrous material groups. The geometry is 100% precision ground and feature Tool Alliance's proprietary SmoothGrinto® technology for superior cutting edge properties and increased chip lubricity. The geometry has been matched with the appropriate Grade, Edge Prep, and Coating for optimum application-specific milling results.



Note HV11 inserts are sold in packs of 6. List prices are for individual inserts. FDP#'s listed below.

> UnCoated \$31.00 Coated \$35.00



Rad

HV11 Insert List Prices

Grade	.032	.062	.090	.125	.187	.250*
20UC	81020UC	81120UC	81220UC	81320UC	81420UC	81520UC
20A1	81020A1	81120A1	81220A1	81320A1	81420A1	81520A1
20D1	81020D1	81120D1	81220D1	81320D1	81420D1	81520D1

*Please note the .250 radius requires a slight modification to cutter pocket for clearance.











Our A1 (TiB2) coating allows for dry machining of many aluminum and non-ferrous applications. Enjoy the cost and environmental benefits of dry machining today!



Our superhard yet thin D1 PVD Diamond coating is the perfect compliment with SmoothGrind's sharp cutting edge for milling abrasive materials.



The HV11's long length creates lengthy, needle-like chips in aluminum.



The Mil-Tec HVC10 and HVC11 Chamfer Mill Series

- Perfect for Aluminum. Non-Ferrous Alloys & more
- Positive Geometry / Free Cutting
- Up to 11/4" axial cutting length
- Super Shear & Power Shear Geometry
- SmoothGrind® surface polish
- SmoothCoat® A1 TiB2 hard coating for dry machining in aluminum
- SmoothCoat® D1 PVD Diamond hard coating for abrasive materials
- Uses standard HV10 and HV11 inserts
- 3 standard included angles



The new HVC10 and HVC11 are the perfect choice for high performance chamfering in aluminum, non-ferrous allovs, abrasive materials, and more. The 100% ground and polished insert features both positive axial and radial rake, allowing a literal shear through the work piece material. The long insert lengths allow for substantive axial LOC. A two screw design lends superior holding strength between insert and body. Also, the razor sharp cutting edge generates smooth, clean cuts resulting in excellent part finishes.



Select an HVC10 Chamfer Cutter Body

All HVC10 Chamfer Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture special angles with lead times as quick as one week.

Included Angle	Axial LOC*	Minor Diam	Major Diam	Height	Keyway	Bore	Insert Pockets	HVC10 Chamfer Body Part Number	EDP Number	Body List Price USD
60°	.818	1-1/2	2.44	1.85	5/16	3/4	3	HVC10-60	10087	\$319.00
90°	.664	1-1/2	2.87	1.85	5/16	3/4	3	HVC10-90	10088	\$385.00
120°	.467	1-1/2	3.18	1.85	5/16	3/4	3	HVC10-120	10089	\$429.00

^{*}Please note that axial LOC will change based upon radius size

Select an HV10 Insert

All HV10 inserts are parallelogram-shaped and measure 7/16" wide by .950 in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear or Power Shear geometry. All inserts have 2 indexes. Length varies by radius.





High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.









HV10 Insert List Prices

Medium positive arind for steels, stainless, and other medium hardness range moothGrind® applications.

Note HV10 inserts are sold in packs of 5

\$28.00

List prices are for individual inserts

EDP#'s listed below.

UnCoated

Coated





.005 .032 20UC 42031UC 42050UC 42060UC 20A1 42031A1 42050A1 42060A1

20D1 42031D1 42050D1 42060D1

Grade .032 21A1 42000A1 42010A1



Select an HV11C Chamfer Cutter Body

All HVC11 Chamfer Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture special angles with lead times as quick as one week.

ncluded Angle	Axial LOC*	Minor Diam	Major Diam	Height	Keyway	Bore	Insert Pockets	HVC11 Chamfer Body Part Number	EDP Number	Body List Price USD
60°	1.278	1-3/4	3.23	2.10	.380	1"	3	HVC11-60	10220	\$451.00
90°	1.040	1-3/4	3.83	2.10	.380	1"	3	HVC11-90	10221	\$550.00
120°	.733	1-3/4	4.29	2.10	.380	1"	3	HVC11-120	10222	\$588.50

^{*}Please note that axial LOC will change based upon radius size

Select an HV11 Insert

All HV11 inserts are parallelogram-shaped and measure 7/16" wide by 1.5" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear geometry. All inserts have 2 indexes. Length varies by radius.







HV11 Insert List Prices

EDP#'s listed below. **UnCoated**

\$35.00 Coated

Note HV11 inserts are sold in packs of 6.





High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.

20UC: UnCoated & no edge prep; Aluminum, non-ferrous, non-metals 20A1: A1 (TiB2) coated for superior lubricity and reduced chip weld 20D1: D1 Diamond coated for wear resistance in abrasive materials

	Rad	
Grade	.032	.062
20UC	81020UC	81120UC
20A1	81020A1	81120A1
20D1	81020D1	81120D1

★ MILTEC®★





Mil-Tec HV3HD, HV5HD, HV10 & HV11 Speeds and Feeds

Speeds and Feeds for the most common material groups plus typical insert selection. Recommendations based on normal slotting & peripheral milling with DOC .100 or less. Speed in Surface Feet per Minute. Feed in Inches per Tooth. HV Series Specifications: Body Diameter +.000 / -.005, TIR with installed insert ±.001



Material	Alloy Grade	Speed SFPM	HV3HD feed per tooth	HV5HD feed per tooth	HV10 / HV11 feed per tooth	Mil-Tec Grade* (Class/Prep/ Coating)	Coolant
Non-Ferrous	6061 Aluminum	1000 - 3000+	.003010	.003012	.003024	20UC or 20A1	Wet
	Copper, Brass	800 - 1500	.003008	.003010	.003018	20UC or 20A1	Wet
	Plastics	500 - 3000+	.003015	.003015	.003015	20UC or 20A1	Dry
Steels	1018, 1020	800 - 1500	.002006	.002008	call factory	51TA	Dry
	4140, 4340, P20	600 - 1200	.002005	.002007	call factory	51TA	Dry
	A2, D2, H13	400 - 1000	.002004	.002006	call factory	51TA	Dry
Stainless Steel	13-8, 15-5, 17-4	500 - 1200	.001004	.001006	call factory	51TA or 11AT	Dry
	303, 304, 316	800 - 1500	.002006	.002006	call factory	51TA or 11AT	Dry
	420, 440C	800 - 1500	.002005	.002005	call factory	51TA or 11AT	Dry
High Temp	Inconel	100 - 300	.001004	.001004	call factory	11AT	Wet
	Titanium	70 - 250	.001004	.001004	call factory	11AT	Wet
Cast Iron	Gray Iron	500 - 1200	.002004	.002006	call factory	11TA	Dry
	Ductile Iron	600 - 1200	.002004	.002006	call factory	11TA	Dry

Carbide Classification designated as 1, 2, or 5



Toughest Grade All applications + Exotics



Hardest Grade Cast Iron, Stainless Low Carbon Steels



Tough + Hard Steels, Stainless Hard materials Edge Prep designated as 0, 1, or 2

SmoothEdge® 0

No Hone, Upsharp = 0 Razor sharp for max shearing Plastics, Aluminum, Non-Ferrous SmoothEdge® 1

Light Hone = 1
Added edge strength w/high shear
General Purpose for most materials

SmoothEdge® 2

Heavy Hone = 2 Strongest cutting edge Exotics, PH Stainless, Heat treated alloys

^{*}Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "52AT" or 5-2-AT).

Part#	Description	Price USD	Package Q	EDP#
HVW-7T	Torx wrench for HV3HD	\$3.30	1	99110
HVW-10T	Torx wrench for HV5(HD&R)	\$3.30	1	99111
HVW-15T	Torx wrench for HV10 / HV11	\$3.30	1	99112
HVS-440T	Torx insert screw / HV3HD	\$16.50	9	99113
HVS-832T	Torx insert screw / HV5(HD&R)	\$16.50	9	99114
HV10-1032T	Torx insert screw / HV10	\$33.00	9	99115
HV11-1032T	Torx insert screw / HV11	\$39.60	6	99116
MT-AS	Anti-Seize tube	\$1.10	1	99106

HV Series Spare Parts

Wrenches, Screws & More

Tighten to 12 - 15 Inch Pounds

Tighten to 16 - 20 Inch Pounds

Tighten to 25 - 28 Inch Pounds

Tighten to 25 - 28 Inch Pounds

About the Mil-Tec HV End Mill Series:

The new Mil-Tec HV (High Velocity) successfully bridges the performance gap between solid carbide end mills and indexable carbide face mills. The combination of positive axial & radial rake geometries, precision & polished grinding, hardened cutter bodies, and SuperNitride PVD hard coatings makes the HV run like a solid carbide end mill, yet the inherent modular makeup allows for flexibility in design, application, and diameter. The HV can be made in special sizes & configurations, including coolant-thru. Call the factory today!

- Positive Axial Geometry = Free cutting with maximized work piece engagement.
- Positive Radial Geometry = Superb chip formation transfers heat away from tool and work piece.
- 100% Precision Ground Insert = Sharp cutting edges, tight tolerances, and excellent coating adhesion.

Applications:





End Milling



Slot Milling



Pocket Milling*



Peripheral Milling

cutting diameter

length of cut
length of reach
overall length

High
Velocity
shank diameter

^{*}Note: The HV Series is not designed for plunge milling. Ramp milling or a starter hole is necessary for pocket milling.





Mil-Tec HD5.1 & HFC High Feed Cutter Speeds and Feeds

Mil-Tec's High Feed Cutters allow for incredible feed rates. Listed Speeds and Feeds are for plus optimal insert selection. Speed in Surface Feet Per Minute. Feed in inches per tooth.



Mil-Tec HD5.1 High Feed Cutter Speeds and Feeds

Material	Alloy Grade	Speed SFPM	HFC feed per tooth	Axial Depth of Cut	Coolant
Steels	1018, 1020	900 - 1000	.020030	.030	Dry
	4140, 4340, P20	700 - 800	.020030	.030	Dry
	A2, D2, H13	600 - 700	.015025	.030	Dry
Stainless Steel	13-8, 15-5, 17-4	600 - 800	.020025	.030	Dry
	303, 304, 316	700 - 900	.020030	.030	Dry
	420, 440C	700 - 900	.020025	.030	Dry

OD = Max Cutter Diameter	Radial Depth of Cut
1"	.355
1-1/4	.585
1-1/2	.820


Recommended starting parameters.





Watch the Mil-Tec HD5.1 High Feed End Mill in action

Mil-Tec HFC High Feed Freedom Cutter Speeds and Feeds



	Material	Alloy Grade	Speed SFPM	1-1/2 and 2" diameter feed per tooth	2-1/2 to 4" diameter feed per tooth	Axial Depth of Cut	Coolant
4	Steels	1018, 1020	900 - 1000	.020040	.015030	.050	Dry
7		4140, 4340, P20	700 - 800	.020040	.015030	.050	Dry
7		A2, D2, H13	600 - 700	.015030	.0100225	.050	Dry
	Stainless Steel	13-8, 15-5, 17-4	600 - 800	.020035	.0150275	.050	Dry
		303, 304, 316	700 - 900	.020035	.0150275	.050	Dry
		420, 440C	700 - 900	.020030	.0150225	.050	Dry



OD = Max Cutter Diameter	Radial Depth of Cut
1-1/2	.620
2"	1.070
2-1/2	1.560
3"	2.050
4"	3.040

Recommended starting parameters.





Watch the Mil-Tec HFC High Feed Freedom Cutter in action!

★ MILTEC®★ **◎**



miltecusa.com

The Mil-Tec HD Heavy Duty Series

- Large 1" Insert
- 1/4" Axial DOC
- 8 indexes for Value
- Positive Geometry / Free Cutting
- NP, PS and SS Geometry
- SmoothGrind® surfaces
- SmoothCoat® PVD hard coating availability
- From 2" to 10" diameter range



The Mil-Tec Heavy Duty Series features a huge 1" IC carbide insert for increased capacity and strength. The HD allows for heavier depth of cuts and higher feed rates for max stock removal. Mil-Tec's HD Series Inserts are available in our SS (Super Shear), PS (Power Shear), & NP (Negative/Positive) geometries. The HD Round machines a beautiful 1/2" radius in robust applications.





Select an HD Heavy Duty Cutter Body

All HD Heavy Duty Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Metric, Left-Hand, Extended Length, Coolant-Thru or other cutter bodies with lead times as quick as one week. Shank diameter is -.0002 / -.0005

						Octagon HE)	Round F	ID	
		Cutter Diameter	Bore	Keyway	Insert Pockets	HD Shell Body Part Number	EDP Number	HD Shell Body Part Number	EDP Number	Body List Price USD
Shell	P. Company	3"	1-1/4	1/2	4	HD-3-4	10090	RHD-3-4	10101	\$396.00
Style		4"	1-1/2	5/8	5	HD-4-5	10091	RHD-4-5	10102	\$495.00
		5"	1-1/2	5/8	5	HD-5-5	10092	RHD-5-5	10103	\$616.00
		6"	1-1/2	5/8	5	HD-6-5	10093	RHD-6-5	10104	\$682.00
		8"	2-1/2	1"	7	HD-8-7	10094	RHD-8-7	10105	\$968.00
	-	10"	2-1/2	1"	8	HD-10-8	10095	RHD-10-8	10106	\$1210.00
RPX Shell	-	Cutter Diameter	Bore	Keyway	Insert Pockets	HD RPX Shell Body Part Number	EDP Number			Body List Price USD
Style		3"	1-1/4	1/2	3	HDRPX-3-3	10096			\$374.00
		4"	1-1/2	5/8	4	HDRPX-4-4	10097			\$474.00
		4"	1-1/2	5/8	5	HDRPX-4-5	10098			\$495.00
RPX Shank		Cutter Diameter	OAL	Shank Diameter	Insert Pockets	HD RPX Shank Body Part Number	EDP Number		·	Body List Price USD
Style		2"	4"	1-1/4	2	HDRPX-2-2-10	10099			\$286.00
		2"	4"	1-1/4	3	HDRPX-2-3-10	10100			\$308.00

Select an HD Heavy Duty Insert

All HD inserts measure 1" inscribed circle, with precision ground & polished SmoothGrind® and Mil-Tec's unique Negative-Positive, Super Shear or Power Shear geometry. All inserts have 8 indexes. Radius size for Octagon is .100, for Round (PS Geometry only) .500.

HD Insert List Prices

Note HD inserts are sold in packs of 5. List prices are for individual inserts. EDP#'s listed below.

UnCoated \$27.00 Coated \$30.00





High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.

Available in Octagon shape only.





Medium positive grind for steels, stainless, and other higher-hardness range applications in Octagon. For Round shape use 20UC for aluminum & non-ferrous, 12AT for titanium / exotics, and 52AT for steels and stainless.

	- 9	
	Grade	Octagon
TA	52TA	42110TA
(AT)	12AT	42120AT

	Grade	Round
UC	20UC	42120UC
	12AT	42112AT
	52AT	42152AT
(AT)	51AT	42151AT



Strongest insert and designed for heavy feed rates. Ideal for steel, stainless, & heat-treated alloys. Available in Octagon only.

_	Grade	Octagon
TA	52TA	42130TA
(AT)	12AT	42140AT
TA	22TA	42150TA

About our Geometry

Mil-Tec's Power Shear (PS) has higher edge strength than the Super Shear (SS). The PS is engineered for use in steels, stainless, titanium & inconel, while the SS is ideal for aluminum and other non-ferrous material groups. The Negative/Positive (NP) is a workhorse design for a wide range of applications. All geometries are 100% precision ground and feature Tool Alliance's proprietary SmoothGrind® technology for superior cutting edge properties and increased chip lubricity.

Part#	Description	Price USD	Package Q	EDP#
HDS-28	Insert screw, HD Heavy Duty	\$18.20	6	99120
MT-AS	Anti-Seize Tube	\$1.10	1	99106



Page # 31 rev2021.1





Metric Sizes All the power and high-performance of Mil-Tec available in metric sizing. The Metric Freedom Cutters on this page use our standard FC inserts displayed on pages #10 to #17.

Select a METRIC Freedom Cutter Plus+ Face Mill Style Body

All Freedom Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We manufacture standards & specials such as Fractional, Coolant-Thru, Cartridge style, aluminum, or other cutter bodies with lead times as quick as one week.





Cutter Diameter	Bore	Keyway	Height	Insert Pockets	FC Plus+ Body Part Number	EDP Number	Body List Price USD
50.0 mm	22 mm	10 mm	43.8 mm	4	FC-50-4-22	05004	\$242.00
63.0 mm	22 mm	10 mm	47.6 mm	4	FC-63-4-22	05005	\$302.50
80.0 mm	27 mm	12 mm	47.6 mm	5	FC-80-5-27	05006	\$379.50
80.0 mm	27 mm	12 mm	47.6 mm	7	FC-80-7-27	05007	\$401.50
100.0 mm	32 mm	14 mm	47.6 mm	6	FC-100-6-32	05008	\$495.00
100.0 mm	32 mm	14 mm	47.6 mm	8	FC-100-8-32	05009	\$528.00
125.0 mm	40 mm	16 mm	53.6 mm	6	FC-125-6-40	05010	\$616.00
125.0 mm	40 mm	16 mm	53.6 mm	9	FC-125-9-40	05011	\$649.00
160.0 mm	40 mm	16 mm	53.6 mm	8	FC-160-8-40	05012	\$682.00
160.0 mm	40 mm	16 mm	53.6 mm	10	FC-160-10-40	05013	\$726.00

Select a METRIC Freedom Cutter Plus+45 Face Mill Style Body

Diameter

All Freedom Cutter Plus+45 Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We manufacture standards & specials such as Fractional, Coolant-Thru, Cartridge style, aluminum, or other cutter bodies with lead times as quick as one week.



Cutter Diameter	Bore	Keyway	Height	Insert Pockets	FC Plus+45 Body Part Number	EDP Number	Body List Price USD
50.0 mm	22 mm	10 mm	52 mm	4	FC45-50-4-2	05101	\$242.00
80.0 mm	27 mm	12 mm	52 mm	6	FC45-80-6-2	05102	\$385.00
100.0 mm	32 mm	14 mm	52 mm	8	FC45-100-8-2	05103	\$528.00
125.0 mm	40 mm	16 mm	52 mm	9	FC45-125-9-2	05104	\$649.00
160.0 mm	40 mm	16 mm	52 mm	10	FC45-160-10-2	05105	\$726.00

Select a METRIC High Feed Freedom Cutter Shank or Face Mill Style Body

OAL

The new Mil-Tec High Feed Freedom Cutter brings incredible metalworking performance to smaller CNC's & 40-taper spindles milling Steels & Stainless (up to 7,500 mm/min) and Titanium & Exotics (up to 152 SMPM @ 1,270 mm/min). High Feed inserts are listed below. Cutter **Shank** Insert **HFC Shank Body EDP Body List**



40.0 mm	32 mm	100 mm		2	HFC-40-2-32	05022	\$231.00
50.0 mm	32 mm	100 mm		2	HFC-50-2-32	05023	\$341.00
Cutter Diameter	Bore	Keyway	Height	Insert Pockets	HFC Shell Body Part Number	EDP Number	Body List Price USD
50.0 mm	22 mm	10 mm	40 mm	4	HFC-50-4-22	05024	\$275.00
63.0 mm	22 mm	10 mm	50 mm	4	HFC-63-4-22	05025	\$357.50
80 0 mm	27 mm	12 mm	50 mm	5	HEC-80-5-27	05026	\$418.00

Pockets



This insert is ideal for roughing steel. Stainless. and cast iron.



This insert is ideal for roughing
Stainless, Titanium, Inconel, and
high-temp alloys.

Part Number



new!

Price USD

\$231.00

2752AT Square

Diameter

Shape Radius # indexes **Price**

AT	6

Shape Radius #indexes 3712AT Square 90 .125

Number



Select a METRIC Freedom Cutter with Extended Reach Shank Style Body All Freedom Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special

pre-hardened steel to exacting tolerances. We manufacture standards & specials such as Fractional, Coolant-Thru, Extended Length, integrated R8 shank, or other cutter bodies with lead times as quick as one week.

Cutter Diameter	Shank	Reach	OAL	Insert Pockets	FC Shank Body Part Number	EDP Number	Body List Price USD
32.0 mm	32 mm	45.6 mm	100 mm	2	FCR-32-2-32	05001	\$165.00
40.0 mm	32 mm	43.5 mm	100 mm	3	FCR-40-3-32	05002	\$209.00
50.0 mm	32 mm	43.5 mm	100 mm	4	FCR-50-4-32	05003	\$308.00

★ MILTEC®★ ©





Select a METRIC HV3HD Cutter Body

All HV3HD Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Fractional, Left-Hand, Extended Length, Coolant-Thru or other cutter bodies with lead times as quick as one week.

Cutter Diameter	LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV3HD Body Part Number	EDP Number	Body List Price USD
16.0 mm	9.15 mm	34 mm	90 mm	16.0 mm	2	HV3HD-16-2	05201	\$107.20
16.0 mm	9.15 mm	69 mm	125 mm	16.0 mm	2	HV3HD-16-2L	05202	\$126.50
20.0 mm	9.15 mm	34 mm	90 mm	20.0 mm	2	HV3HD-20-2	05203	\$107.20
20.0 mm	9.15 mm	94 mm	150 mm	20.0 mm	2	HV3HD-20-2L	05204	\$126.50
25.0 mm	9.15 mm	54 mm	110 mm	25.0 mm	3	HV3HD-25-3	05205	\$112.80
25.0 mm	9.15 mm	144 mm	200 mm	25.0 mm	3	HV3HD-25-3L	05206	\$159.50

Select a Radius & Geometry All HV3HD inserts are parallelogram-shaped and measure 6.35mm wide by 9.15mm in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Power

UnCoated \$12.50 Coated \$13.50 Note HV3HD inserts are sold in

HV3HD Insert List Prices

packs of 10. List prices are for individual inserts. EDP#'s listed below.



Select an Insert Grade

Our proprietary carbide substrates and in-house SmoothCoat® PVD SuperNitride hard coatings are scientifically mated for Application-Specific usage. EDP numbers are listed below.



Shear or Super Shear geometry.

High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.

	Rad			
Grade	0.5mm	1.0mm	2.0mm	3.0mm
20UC	05214UC	05215UC	05216UC	05217UC
20A1	05224A1	05225A1	05226A1	05227A1
51TA	05244TA	05245TA	05246TA	05247TA
11AT	05254AT	05255AT	05256AT	05257AT



ver Shear ledium Dish SmoothGrind®

Rad

Medium positive grind for steels, stainless, and other higher-hardness range applications.

	Itaa			
Grade	0.5mm	1.0mm	2.0mm	3.0mm
20UC	05210UC	05211UC	05212UC	05213UC
20A1	05220A1	05221A1	05222A1	05223A1
51TA	05240TA	05241TA	05242TA	05243TA
11AT	05250AT	05251AT	05252AT	05253AT



Metric Sizes

Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "51AT" or 5-1-AT). These metric inserts are compatible with the fractional HV Series cutter bodies, allowing for the ability to utilize metric radii sizes.



Select a METRIC HV5HD Cutter Body

All HV5HD Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Fractional, Left-Hand, Extended Length, Coolant-Thru or other cutter bodies with lead times as quick as one week.

Cutter Diameter	LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV5HD Body Part Number	EDP Number	Body List Price USD
25.0 mm	15.25 mm	54 mm	110 mm	25.0 mm	2	HV5HD-25-2	05301	\$112.80
25.0 mm	15.25 mm	94 mm	150 mm	25.0 mm	2	HV5HD-25-2L	05302	\$165.00
32.0 mm	15.25 mm	54 mm	110 mm	32.0 mm	3	HV5HD-32-3	05303	\$145.80
32.0 mm	15.25 mm	144 mm	200 mm	32.0 mm	3	HV5HD-32-3L	05304	\$192.50
40.0 mm	15.25 mm	59 mm	115 mm	40.0 mm	4	HV5HD-40-4	05305	\$159.50
40.0 mm	15.25 mm	144 mm	200 mm	40.0 mm	4	HV5HD-40-4L	05306	\$215.60

Select a Radius & Geometry All HV5HD inserts are parallelogram-shaped and measure 9.5mm wide by 15.25mm in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Power Shear or Super Shear geometry.

HV5HD Insert List Prices

UnCoated \$13.50 \$14.50 Coated

Note HV5HD inserts are sold in packs of 10. List prices are for individual inserts. EDP#'s listed below



Select an Insert Grade

Our proprietary carbide substrates and in-house SmoothCoat® PVD SuperNitride hard coatings are scientifically mated for Application-Specific usage. EDP numbers are listed below.



High positive grind ideal for aluminum, non-ferrous, SmoothGrind® plastic, & non-metals.

Rad

0.5mm 1.0mm 2.0mm 3.0mm 4.0mm 5.0mm 20UC 05316UC 05317UC 05318UC 05319UC 05320UC 05321UC **20A1** 05328A1 05329A1 05330A1 05331A1 05332A1 05333A1 51TA 05352TA 05353TA 05354TA 05355TA 05356TA 05357TA 11AT 05364AT 05365AT 05366AT 05367AT 05368AT 05369AT



Medium positive grind for steels, stainless, and other higher-hardness range applications.

Rad

0.5mm 1.0mm 2.0mm 3.0mm 4.0mm 5.0mm 20UC 05310UC 05311UC 05312UC 05313UC 05314UC 05315UC 05322A1 | 05323A1 | 05324A1 | 05325A1 | 05326A1 | 05327A1 05346TA 05347TA 05348TA 05349TA 05350TA 05351TA 11AT 05358AT 05359AT 05360AT 05361AT 05362AT 05363AT

★ MIL·TEC®★ **©**





Select a METRIC HV10 Cutter Body (Shank & Shell Mill Styles)

All HV10 Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Fractional, Left-Hand, Extended Length, Coolant-Thru or other cutter bodies with lead times as quick as one week.



Cutter Diameter	LOC	LOR	OAL	Shank Diameter	Insert Pockets	HV10 Shank Body Part Number	EDP Number	Body List Price USD
32.0 mm	25.0 mm	50 mm	115 mm	20.0 mm	2	HV10-32-2-20	05401	\$173.20
32.0 mm	25.0 mm	50 mm	115 mm	25.0 mm	2	HV10-32-2-25	05402	\$173.20
32.0 mm	25.0 mm	50 mm	115 mm	32.0 mm	2	HV10-32-2-32	05403	\$173.20
40.0 mm	25.0 mm	50 mm	115 mm	25.0 mm	3	HV10-40-3-25	05404	\$198.00
40.0 mm	25.0 mm	50 mm	115 mm	32.0 mm	3	HV10-40-3-32	05405	\$198.00
50.0 mm	25.0 mm	50 mm	115 mm	32.0 mm	3	HV10-50-3-32	05406	\$269.50
Cutter Diameter	LOC	Height	Keyway	Bore	Insert Pockets	HV10 Shell Body Part Number	EDP Number	Body List Price USD
50.0 mm	25.0 mm	54.6 mm	10 mm	22.0 mm	3	HV10-50-3-22	05407	\$269.50
63.0 mm	25.0 mm	54.6 mm	10 mm	22.0 mm	4	HV10-63-4-22	05408	\$412.50
80.0 mm	25.0 mm	54.6 mm	12 mm	27.0 mm	5	HV10-80-5-27	05409	\$412.50
100.0 mm	25.0 mm	54.6 mm	14 mm	32.0 mm	5	HV10-100-5-32	05410	\$539.00

Select a Radius & Geometry

All HV10 inserts are parallelogram-shaped and measure 11mm wide by 25mm in length, with 2 precision ground & polished indexes featuring Mil-Tec's unique SmoothGrind® & Super Shear geometry.



UnCoated \$25.00 Coated \$28.00

Note HV10 inserts are sold in packs of 5. List prices are for individual inserts. EDP#'s listed below.

Select an Insert Grade

Our proprietary carbide substrates and in-house SmoothCoat® PVD SuperNitride hard coatings are scientifically mated for Application—Specific usage. EDP numbers are listed below.



High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals.

Rad

Grade 1.0mm 2.0mm 3.0mm 4.0mm 5.0mm* 20UC 05411UC 05412UC 05413UC 05423UC 05414UC

20A1 05415A1 05416A1 05417A1 05427A1 05418A1



*Large 5.0 mm radius may require additional body clearance



Please note that the combination of Carbide Class, Edge Prep & Coating constitute the insert Grade (i.e. "20UC" or 2-0-UC). These metric inserts are compatible with the fractional HV10 or HD Series cutter bodies, allowing for the ability to utilize metric radii sizes.



Select a METRIC Heavy Duty (HD) Face Mill Cutter Body

All HD (Heavy Duty) Cutter Bodies are machined in our own modern CNC factory in Fort Myers, FL from special pre-hardened steel to exacting tolerances. We can manufacture specials such as Fractional, Left-Hand, Extended Length, Coolant-Thru or other cutter bodies with lead times as quick as one week.



Cutter Diameter	Bore	Keyway	Insert Pockets	Heavy Duty Body Part Number	EDP Number	Body List Price USD
80.0 mm	32 mm	12 mm	4	HDFC-80-4-32	05151	\$396.00
100.0 mm	32 mm	14 mm	5	HDFC-100-5-32	05152	\$539.00
125.0 mm	40 mm	16 mm	5	HDFC-125-5-40	05153	\$616.00
160.0 mm	40 mm	16 mm	5	HDFC-160-5-40	05154	\$682.00
200.0 mm	60 mm	25 mm	7	HDFC-200-7-60	05155	\$1078.00
250.0 mm	60 mm	25 mm	8	HDFC-250-8-60	05156	\$1320.00

Select a Radius & Geometry

All HD inserts are Octagon–shaped and measure 25mm inscribed circle, with precision ground & polished SmoothGrind® and Mil–Tec's unique NP, PS or SS geometry. Each insert has 8 indexes and share a 2.5mm radius.

HD Insert List Prices

UnCoated \$27.00 Coated \$30.00

Note HD inserts are sold in packs of 6. List prices are for individual inserts. EDP#'s listed below.

Select an Insert Grade

Our proprietary carbide substrates and in-house SmoothCoat® PVD SuperNitride hard coatings are scientifically mated for Application–Specific usage. EDP numbers are listed below.



Rad 2.5mm
20UC 05161UC
20A1 05162A1





Grade	2.5mm
22TA	05157TA
52TA	05158TA
12AT	05159AT



Rad Grade 2.5mm 52TA 05160TA

4

★ MILTEC®★ ●

Mil-Tec Specials Capabilities




- Precision 5-axis machining
- CAD design / development
- Fast quotations
- Fast deliveries
- Tight pocket tolerances
- Slotters, Reach, Chamfers, Cartridge, & more



When you need special indexable milling solutions, and need them fast, Mil-Tec is the answer. We can deliver special cutters incorporating our Freedom Cutter, High Velocity, or Heavy Duty family of inserts in the time it takes the large global firms to return a quotation. We can handle apps for slotting, reach, chamfering, undercuts, coolant-thru, and more, quickly and efficiently, all with traditional Mil-Tec quality.







For quotations, technical support, and application information contact us at (800) 564-5832 or sales@miltecusa.com





Mil-Tec Special Apps

Unique apps utilizing specialty Freedom Cutter and HV Series inserts

Please see Pages #16 & 17 to individually select these Freedom Cutter insert styles



Diamond

Mil-Tec offers a full range of inserts with PCD tips and diamond coatings. These inserts provide maximum wear resistance and lubricity when used in non-ferrous and non-metal applications. Our D1 (PVD Diamond) offers great value and can be applied to any of our inserts. For maximum wear with a coating, select our D2 (CVD Diamond). Lastly, our PCD product offers extremely high wear with mirror finishes.




Silcon Nitride & Cermet

Mil-Tec's silicon nitride and cermet grades offer a higher level of wear resistance and heat stability than cemented carbide. While still lacking the toughness of carbide, new technology has dramatically increased the durability of these grades. Our silicon nitride is ideal for cast & ductile iron applications, while cermet is targeted for steels and stainless. Please note ground insert geometry selection is limited.



Wipers

Mil-Tec's wiper inserts can produce smooth workpiece finishes in a wide range of materials. We carry wiper designs in all three Freedom Cutter shapes (square, round, and octagon). A single wiper insert is used in a cutter body array, and each has a single index. Depths of cut range from .005 to .025".



Aluminum Wipers

Mil-Tec offers a dedicated aluminum wiper designed to provide excellent finishes while performing either roughing or finishing operations. This unique geometry is ground on our square Freedom Cutter insert and features a .032" radius on each index. A .047" wiper flat is blended to the radius and provides surface finishes as low as 15 Ra.





The Mil-Tec HV5SL Custom Slotting Cutters & Inserts

phone 800.564.5832 / fax 866.244.0298

- Staggered insert design
- Positive Geometry / Free Cutting
- SS Geometry
- SmoothGrind® surface polish
- SmoothCoat® PVD hard coatings
- From 1-1/2" to 12" diameter range
- 3 standard sizes, plus a wide range of possible special configurations
- End Cut style for narrow widths
- Side Cut style for wider widths
- Shank, shell mill, and arbor body styles
- Special sizes priced on application, with deliveries as fast as 1 week

The HV5SL Slotting Cutter system is designed for slotting, grooving, and creating precision undercuts in aluminum, non-ferrous, and plastic materials. The SuperShear insert geometry is ground to a polished, mirror finish and produces outstanding workpiece finishes. Our SuperShear Slot insert is available in both End Cutting and Side Cutting geometries to provide a range of cutting widths. Each style features two cutting edges (indexes) and is offered in four radius sizes. The Mil-Tec Slotting Cutter bodies feature staggered tooth positioning for maximum chip evacuation.

From side cuts in aluminum racing pistons to general milling, the HV5SL Slotting series offers excellent performance and flexibility, with our custom manufacturing abilities providing unique solutions as quick as 1 week.



Shank style: Shell mill style: Minimum Diam 1-1/2" 2-1/2"

Maximum Diam 6" 12"

End Cut style:

Minimum Width .500"

Maximum Width .710"

Side Cut style:

.710"

1.160"



Side Cutting

Now featuring 3 new Side Cutting, shell-mill style standards!

Part Number	Diameter	Width*	Bore	pockets	EDP#	List Price
HV5SL-SC-3-6	3"	3/4"	1"	6	10120	\$500.00
HV5SL-SC-4-8	4"	3/4"	1"	8	10121	\$570.00
HV5SL-SC-6-10	6"	3/4"	1-1/4"	10	10122	\$750.00

*Width is based on .032 radius; larger radius reduces width

• Our HV5SL slotting cutters utilize a new Mil-Tec HV5HD insert geometry:

Select an HV5HD Slotting Insert

All HV5HD inserts are parallelogram-shaped and measure 3/8" wide by .600" in length, with precision ground & polished SmoothGrind® and Mil-Tec's unique Super Shear geometry. All inserts have 2 indexes. Length varies by radius.



High positive grind ideal for aluminum, non-ferrous, plastic, & non-metals. Slotting geometry ground in Side Cutting RH or LH, and End Cutting RH or LH.

3/8" Width tolerance for slotting = $\pm .005$



Note HV5HD inserts are sold in packs of 10. List prices are for individual inserts EDP#'s listed below.

HV5HD Insert UnCoated **List Prices**

Coated

\$15.00







Our A1, D1, and TC coatings are excellent in various forms of aluminum, plastics, and non-ferrous materials. To order, substitute the appropriate suffix to replace UC.











End Cutting

Arbor Style

★MILTEC®★ ◎



miltecusa.com

Mil-Tec for Titanium, Inconel, Stainless, Exotics

Mil-Tec's high Positive Geometry and Precision Ground inserts are ideal for milling exotic materials such as Titanium, Inconel, Stainless Steel, and other High-Temp alloys. And with the huge family of Freedom Cutters and HV Series indexable end mills to select from, your specialized solution awaits. Reprogram your Milling Expectations!



- High Positive Geometry
- Shearing cutting action
- Sharp, strong cutting edge
- Chip retains heat, not work piece
- Reduces "work hardening"
- Highly efficient on 40 taper CNC's

SHEARDISBELIEF



OURSShears material with positive ground geometry Carries heat off with the chipLeaves the workpiece cool to the touch



THEIRS Pushes material with pressed geometryPunishes the workpiecePunishes the entire machine tool assembly

"REPROGRAM YOUR MILLING EXPECTATIONS"

The Freedom Cutter Plus+ with the Mag-Na-Shear (MS) precision ground insert with chipbreaker.



These 6Al-4V Titanium chips tell the story...



This picture indicates poor chip formation. Dull, torn, and undefined shape indicates poor cutting conditions.

POOR



These chips were sheared with Mil-Tec's Power

IDEAL

Shear (PS) insert geometry. Smooth & shiny with a tight curl, this picture indicates a chip formation under ideal cutting conditions.



Precision ground inserts + Positive geometry = Efficient High Speed Machining.

Outstanding qualitative insert characteristics combined with specialized cutters:

Smooth Coat®

Milling exotics requires a world-class PVD hardcoating, and Mil-Tec offers just that with our exclusive SmoothCoat formulations.



Our TiAlN is superb for all applications including wet or dry milling.



Our AlTiN is thicker, has a higher thermal resistance, and is ideal for dry milling.



Our Titanium DiBoride (TiB2) has excellent lubricity and retains edge sharpness; great for Titanium.


Smooth Edge[®]



edge prep: .00016" edge width!



The all new Mil-Tec Freedom Cutter Dedicated Round (FCDR) was engineered specifically for milling titanium and high-temp alloys.



insert geometry.





ool Alliance®: Ready, Set, Cut!™

About the brands of Tool Alliance® For more info contact sales@toolalliance.com

We obsess over details that create the finest cutting tools available. Our reward is customer satisfaction via increased factory productivity. We cannot be the best without thinking differently, so over a 49 year operating history we've developed proprietary technologies and brands that yield significant characteristics and designs of cutting tools unlike any you'll find elsewhere:



The world's first web-based design, blueprint, quotation, and ordering system for solid carbide specials brings real time information to cutting tool consumers everywhere on a 24/7/365 virtual basis.

> Customize Yourself.™ tungstentoolworks.com



Celebrating 49 years of providing the industry's highest value in solid carbide standards and blueprint specials.

> The Total Value Carbide Solution.™ ultra-tool.com



Precision ground and polished carbide insert geometries utilized within a family of advanced end mill & face mill cutter bodies.

> Reprogram your milling expectations.™ miltecusa.com



High-performance solid carbide round tools for die & mold, medical, consumer electronic, aerospace, composite, and micro machining.

Not just where machining is, but where machining will be.™ roundtool.com



Bringing the Tool Alliance principles of Performance & Value to the woodworking and plastics industry.

> Proven daily by the linear foot.™ routco.com

About the technology partners of Tool Alliance®

Our technology partners are second to none. We find premier firms, the technological leaders in their respective industries, throughout the world and work with them in progressive, win-win relationships to bring our customers the very finest components and characteristics that we build into our products. Constant reinvestment into our company-owned factories promise long-term stability & consistency in delivering Performance & Solutions to carbide rotary tooling consumers everywhere. Grinding centers



VMC control



Substrate, abrasive, coolants & workholding



Robotics

CNC grinder control



Coating systems **★**MILTEC®★

Mil-Tec® Terms & Conditions

Ordering Information: All Mil-Tec® products have an EDP number and a Part number. One or both may be used when entering orders via eMail or fax (preferred methods), phone, or postal mail communications. If the product is coated, be sure to include the coating suffix.

Availability: Mil-Tec® products are available through select Industrial Distributors, catalog houses, and our website. Locally, your Industrial Distributor can provide communication, technical assistance, and inventory support. Standard products are subject to prior sale.

Pricing: All prices shown are effective March 1, 2021, supersede and cancel all previous listed prices, and subject to change without notice. The amount of any present or future sales tax, value-added tax, or similar tax applicable to the products listed herein shall be added to the purchase price and paid by the customer. All sales made at list price less standard applicable distributor discount. Contract pricing must be obtained in writing via current quotation, with stated pricing, effective date, and expiration date, to be valid.

Shipping: Preferred carriers are UPS ground services, Federal Express Express Saver (Guaranteed 3-Day), and Federal Express premium services. Prices quoted herein are F.O.B. our shipping warehouses in Fort Myers, Florida, or Huntington Beach, California, U.S.A.

Terms: Domestic and Export Net 30 Days.

Minimum Charge: \$50.00 Net.

Returned Items: Current catalog items may be returnable subject to a 25% handling charge and approval by the Mil-Tec $^{\odot}$ Inspection Department. Credit cannot be issued for any product that has in any way been modified, machined, altered, coated, marked, or displaying other characteristics that render it in a "used" condition. Additionally, as our tolerances, substrate, and grinding methods are continually improved, products sold one year ago and prior are not returnable. A Returned Goods Authorization (RGA) number must be obtained from the Tool Alliance® Sales Department prior to return. Returned product must be sent to the Factory for credit; consignment locations are not capable of issuing either RGA's or credit memos. Special tools are not returnable.

Specials Policy: We reserve the right to overship or undership and invoice special tools up to a 10% variance per item. Quantities under 10 are subject to a one-piece variance. Any variations to this policy must be stated in advance as it will effect pricing upon quotation. Special orders cannot be cancelled without prior approval and proper consideration.

Product Warranty: Mil-Tec® warrants that products sold by it shall be free from defects in materials and workmanship. Mil-Tec will replace, repair, or grant credit for any product which does not comply with this warranty. This warranty does not apply to any products which have been in any way modified, machined, misused, subjected to accident, or used beyond normal life. Warranty claims should be made through the distributor from whom the product was purchased. There are no other warranties, expressed or implied, made by us except as expressed above, and we neither assume nor authorize any other firm or person to assume for it any other obligation or liability in connection with our products.

Safety Notice: Always wear appropriate PPE (safety glasses, masks, gloves, etc.) when using rotary cutting tools. Machine tools should be fully guarded. Technical data provided should be considered advisory only as machining conditions will vary based on app. Our packages carry a safety warning label. $Mil-Tec^{\circ}$ is not responsible for damages or accidents caused by modifying or altering our products without prior written consent.

Cooperative Advertising: Mil- Tec° does not participate in any cooperative advertising programs with either industrial distributors or manufacturer's representatives. This policy allows us to avoid any possible favoritism or conflicts of interest, and keeps costs and sales prices as low as possible.

is friendly to the environment. All paper products are separated for reuse and shredded for packaging materials. Shipping boxes are reused when possible. Conservation programs are in place for reduced energy use (additionally, our coastal locations eliminate the need for artificial heating or cooling on many days). All displaced materials during the manufacturing process are collected, separated, and returned to a materials recycler. Coolants are recycled when appropriate. Mop water is evaporated and resultant sediment is properly disposed. Skylights provide natural lighting and reduce electricity usage.

Visit our factories on your next trip to the greater Los Angeles / San Diego, CA or Fort Myers / Naples, FL areas. View our automated facilities, meet our Associates, and tell us how we can better grow our relationship together. Huntington Beach is officially "Surf City" with miles of open beach on the Pacific Ocean, and we're minutes away from attractions such as Disneyland, Knott's, Universal Studios, Reagan and Nixon Presidential Libraries, Getty Museum, Dodger Stadium, Staples Center, Angel Stadium, Honda Center, The Tool Alliance Club, and the list goes on. The closest airport is Orange County (SNA), followed by Long Beach (LGB), Los Angeles (LAX), and then Ontario (ONT). Fort Myers (airport code RSW) & Punta Gorda (PGD) are on the beautiful Gulf of Mexico coast, a recreational haven, home to Major League Baseball spring training, and within a 3-hour drive to Orlando, Tampa Bay, Sarasota, Miami, Fort Lauderdale, the Everglades, and more.



Tool Alliance / Florida Mil-Tec, Incorporated 5578 6th Street West Lehigh Acres, FL 33971 (800) 564-5832 • fax (866) 244-0298 Tool Alliance / California Ultra-Tool Int'l, Inc. 5451 McFadden Avenue Huntington Beach, CA 92649 (800) 854-2431 • fax (714) 891-7816



See us on the web at: toolalliance.com sales@toolalliance.com Mil-Tec Catalog Version 2021

All contents Copyright Tool Alliance

miltecusa.com

phone 800.564.5832 / fax 866.244.0298

80 .0135	1/8 .1250	19/64 .2969
79 .0145	30 .1285	N .3020
1/64 .0156	29 .1360	5/16 .3125
78 .0160	.1378 3.5mm	.3150 8.0mm
77 .0180	28 .1405	O .3160
.0197 0.5mm	9/64 .1406	P .3230
76 .0200 75 .0210	27 .1440	21/64 .3281
75 .0210 74 .0225	26 . 1470 25 . 1495	Q .3320 .3346 8.5mm
73 .0240	24 .1520	R .3390
72 .0250	23 .1540	11/32 .3438
71 .0260	5/32 .1562	S .3480
70 .0280	22 .1570	.3543 9.0mm
69 .0292	.1575 4.0mm	T .3580
68 .0310	21 . <mark>1590</mark>	23/64 .3594
1/32 .0312	20 .1610	U .3680
67 .0320	19 .1660	.3740 9.5mm
66 .0330	18 .1695	3/8 .3750
65 . 0350	11/64 .1719	V .3770
64 .0360	17 .1730	W .3860
63 .0370	16 .1770	25/64 .3906
62 .0380	.1772 4.5mm	.3937 10.0mm
61 .0390 .0394 1.0mm	15 . <mark>1800</mark> 14 . <mark>1820</mark>	X .3970 Y .4040
60 .0400	13 .1850	13/32 .4062
59 .0410	3/16 . 1875	7 .4130
58 .0420	12 .1890	.4134 10.5mm
57 .0430	11 .1910	27/64 .4219
56 .0465	10 .1935	.4331 11.0mm
3/64 .0469	9 .1960	7/16 .4375
55 .0520	.1969 5.0mm	.4528 11.5mm
54 .0550	8 .1 <mark>990</mark>	29/64 .4531
0591 1.5mm	7 .2010	15/32 .4688
53 .0595	13/64 .2031	.4724 12.0mm
1/16 .0625	6 .2040	31/64 .4844
52 .0635	5 . 2055	.4921 12.5mm
51 .0670	4 .2090	1/2 .5000
50 .0700	3 .2130	.5118 13.0mm
49 .0730	.2165 5.5mm	33/64 .5156
48 .0760 5/64 .0781	7/32 .2188 2 .2210	17/32 .5312 .5315 13.5mm
47 .0785	1 .2280	35/64 .5469
.0787 2.0mm	A .2340	.5512 14.0mm
46 .0810	15/64 .2344	9/16 .5625
45 .0820	.2362 6.0mm	.5709 14.5mm
44 .0860	B .2380	37/64 .5781
43 .0890	C .2420	.5906 15.0mm
42 .0935	D .2460	19/32 .5938
3/32 .0938	E .2500	39/64 .6094
41 .0960	1/4 .2500	.6102 15.5mm
40 .0980	.2559 6.5mm	5/8 .6250
.0984 2.5mm	F .2570	.6299 16.0mm
39 .0995	G .2610	41/64 .6406
38 .1015	17/64 .2656	.6496 16.5mm
37 .1040	H .2660	21/32 .6562
36 . 1065	1 .2720	.6693 17.0mm
7/64 .1094 35 .1100	.2756 7.0mm	43/64 .6719
35 .1100 34 .1110	J .2770 K .2810	11/16 .6875
34 .1110 33 .1130	9/32 .2812	.6890 17.5mm 45/64 . .7031
32 .1160	L .2900	.7087 18.0mm
.1181 3.0mm	M .2950	23/32 .7188
31 .1200	.2953 7.5mm	.7283 18.5mm
J 200		200 10.011111









13/16 .8125

53/64 **.8281** 27/32 **.8438**

55/64 **.8594**

7/8 .8750

57/64 .8906

29/32 .**9062** 59/64 .**9219**

15/16 **.9375**

61/64 .9531

31/32 .9688

63/64 .9844

.8268 21.0mm

.8465 21.5mm

.8661 22.0mm

.8858 22.5mm

.9055 23.0mm

.9252 23.5mm

.9449 24.0mm

.9646 24.5mm

.9843 25.0mm

1" 1.000 25.4mm

Conversion Formulas


multiply by 25.4
millimeters to inches:
multiply by .03937



toolalliance.com

Mil-Tec® sales features:

- The Company created and patented the Freedom Cutter, allowing square, octagon, and round inserts to seat in the same cutter body.
- Our precision ground carbide inserts provide incredible shearing via positive geometries & work excellent within a wide machine tool spectrum.
- Mil-Tec is dedicated solely to the indexable carbide tooling industry.
- We are privately held, operate with long-term focus and goals, and manufacture 100% of our products within factory buildings that we own exclusively within the USA.
- Our substrate, geometry, and coating are specially selected for each application and Series.
- Our cutting tools have extremely accurate diameter, radius, and concentricity characteristics.
- Our edge prep process provides toughness and strength.
- Our grinding method & coating technology yields an extremely sharp & long-lasting cutting edge.
- We perform in-house, 5-axis cutter body machining and testing.
- We offer proprietary coatings such as A1 (TiB2) and AT (HSN2), all performed in-house for quick delivery.
- Our inserts are also completely proprietary / Non-ISO.
- We can stock firm blanket orders.
- We are able to quickly quote and manufacture print specials.
- Both fractional and metric size ranges are offered.
- We have sales offices in both coastal time zones (Florida and California).
- We have large standard inventories and excellent service levels.
- We strongly support traditional Industrial Distribution.

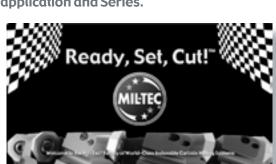

Always made in the USA. Learn more at miltecusa.com



About the technology of Mil-Tec® and Tool Alliance®:

We obsess over details that create the finest cutting tools available. Our reward is customer satisfaction via increasing their factory productivity. We cannot be the best without thinking differently, so over a forty-nine year operating history we've developed proprietary technologies that yield significant characteristics of cutting tools unlike any you'll find elsewhere:

- SmoothGrind® = Polished cutting edges for extreme sharpness and lubricity.
- $\bullet \ Smooth Contricity @= Precision\ grinding,\ tool\ holding,\ and\ tolerances\ for\ minimized\ TIR.$
- SmoothCoat® = Sputter-based SuperNitride PVD coating for superior surface hardness & uniformity.
- ullet SmoothEdgeullet = Surface and edge preparation for lubricity and minimized break-in.



Sharpness & Lubricity. No wonder it works better.

Sintered APKT geometry (top) versus Mil-Tec precision ground (bottom).




SmoothGrind®

Tight tolerances. Minimized run-out.



SmoothContricity®

Our coating @ 2,000X (top). Everybody else's (bottom).



SmoothCoat®

Edge Integrity. Runs great on the first pass.

Mil-Tec Freedom Cutter insert cutting edge magnified to display SE2 hone.



SmoothEdge®



Mil-Tec, Incorporated 5578 6th Street West Lehigh Acres, FL 33971

(800) 564-5832 • fax (866) 244-0298 eMail: sales@miltecusa.com miltecusa.com • toolalliance.com



American Owned

Proudly Distributed By:

Mil-Tec Catalog Version 2021 • All contents Copyright Tool Alliance