



YOUR SHRINK FIT SOLUTION!

ADVANCED TECHNOLOGY FOR PRECISION MACHINING



< START.2

- Easy mobility due to compact size and lightweight materials.
- Operate up to 2 cooling units simultaneously (2nd unit is an optional purchase).
- Max. Tool Height: 12.4" (315mm)
- Shrink machine unit net weight: 41.9 lbs. (19 kg)


BOTH MODELS FEATURE:

- Automatic detection of cutting tool sizes to eliminate overheating of the toolholder.
- Inductor rotates 180° to easily remove broken tools.
- Adapters to accommodate multiple taper types (ISO, HSK, Polygonal).
- Widest shrinking range available for a desktop unit: 0.079" - 1.575" (Ø 2 - 40mm)
- 3-Phase Power Supply available in 200V or 400V.
- Unique slide-out Control Module for easy service or repair within 24 hours.

FI-6 >

- Built for high changeover demands with safety in mind.
- Two built-in cooling units to support high quantity tool assembly.
- Maximum Tool Height: 17" (432mm)
- Shrink machine unit net weight (options excluded): 143.3 lbs. (65 kg)

View the complete Fi-6 Shrink Fit unit video on YouTube by scanning the QR code!

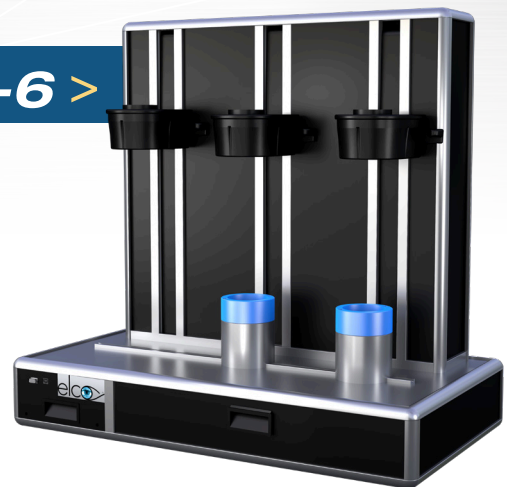

847.367.4800 | sales@lyndexnikken.com

www.lyndexnikken.com

Connect With Us!    